



WPA



WPS



WPX



WPO



WPDA



WPDS



WPDX



WPDO



WPKA



WPKS



WPDKA



WPKS



WPW



WPWA



WPWS





WP 系列蜗轮蜗杆减速机

WPWX



WPWO



WPWT



WPWV



WPWD



WPWDA




WPWDS



WPWDX



WPWDO



WPWDT



WPWDV



WPWK



WPWKA



WPWKS



WPWKO






WPWKT



WPWKV



WPWDK



WPWDKA



WPWDKS



WPWDKO



WPWDKT



WPWDKV



WPWE



WPEA



WPES



WPEX



WPEO



WPWED



WPEDA





WP 系列蜗轮蜗杆减速机

WPEDS



WPEDX



WPEDO



WPWEK



WPEKA



WPEKS



WPWEKO



WPWEDK



WPEDKA



WPEDKS



WPWEDKO



WPEEDA



WPPEO



WD




OX TV AS





产品结构图

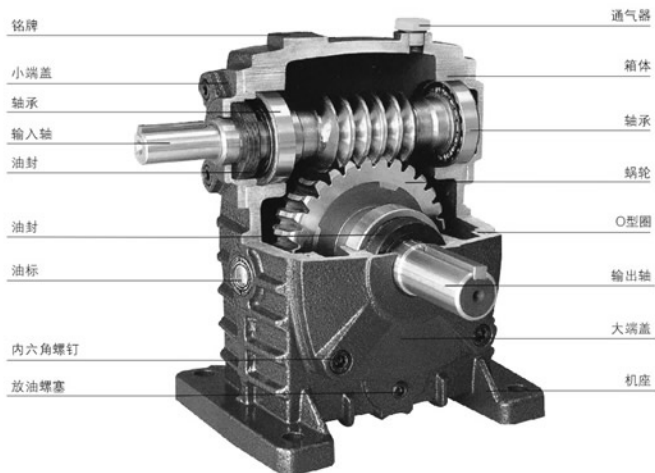

型号结构表

W	P	W	E	D	K	A	60-100	800	B
1	2	3	4	5	6	7	8	9	10

1	产品名称 W-蜗杆减速机	6	输出轴结构 K-中空输出轴, 无代码-基本型
2	箱体结构 P-整体, D-分体	7	输出、输入轴型式 A-入轴在下, S-入轴在上, O-出轴向上, X-出轴向下, T-入轴向上, V-入轴向下, 无代码-万能型
3	箱体型式 W-万能型, 无代码-基本型	8	中心距 60-100
4	整机结构 E-双级, EE-多级, 无代码-基本型	9	传动比 800
5	输入轴联接方式 D-带电机法兰, 无代码-基本型	10	轴指向 B





WP 系列蜗轮蜗杆减速机

WPA 型



轴指向表示 SHAFT DIRECTION

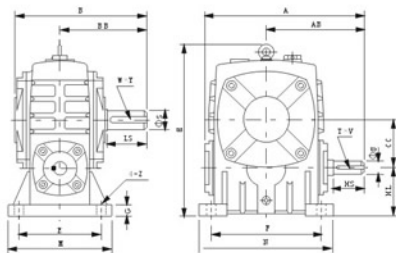



型号 size	减速比 ratio	A	AB	B	BB	CC	H	HL	M	N	E	F	G	Z	输入轴 input shaft	输出轴 output shaft	重量 weight(kg)				
40		143	87	114	74	40	138	40	90	100	70	80	13	10	25	12	TXV	LS	S	WXY	
50		175	107	150	97	50	178	50	120	140	95	110	15	12	30	12	4x2.5	28	14	5x3	4
60	1/10	198	122	188	112	60	204	60	130	150	105	120	20	12	40	15	5x3	50	22	6x3.5	10
70	1/15	231	140	194	131	70	236	70	150	190	115	150	20	15	40	18	6x3.5	60	28	8x4	15
80	1/20	261	160	214	142	80	268	80	170	220	135	180	20	15	50	22	8x3.5	65	32	10x5	20
100	1/25	322	190	254	169	100	336	100	100	270	155	220	25	15	50	25	8x4	75	38	10x5	35
120	1/30	381	229	282	190	120	430	120	230	320	180	260	30	18	65	30	8x4	85	45	14x5.5	60
135	1/40	433	260	317	210	135	480	135	250	350	200	290	30	18	75	35	10x5	95	55	16x8	80
155	1/50	504	302	382	252	155	531	135	275	390	220	320	35	21	85	40	12x5	110	60	18x7	110
175	1/60	545	325	402	262	175	600	160	310	430	250	350	40	21	85	45	14x5.5	110	65	18x7	150
200		587	350	487	305	200	668	175	360	480	290	390	40	24	95	50	14x5.5	125	70	20x7.5	215
250		705	420	552	390	250	800	200	460	580	380	480	45	28	110	60	18x7	155	90	25x9	390

WPS 型



轴指向表示 SHAFT DIRECTION

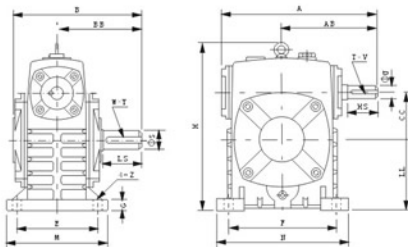

型号	减速比	A	AB	B	BB	CC	H	LL	M	N	E	F	G	Z	输入轴 input shaft	输出轴 output shaft	重量				
size	ratio														HS U	T×V	LS S	WXY	(weight(kg))		
40		143	87	114	74	40	138	60	90	100	70	80	13	10	25	12	4X2.5	28	14	5X3	4
50		175	107	150	97	50	178	80	120	140	95	110	15	12	30	12	4X2.5	40	17	5X3	7
60	1/10	198	122	188	112	60	204	90	130	150	105	120	20	12	40	15	5X3	50	22	6X3.5	10
70	1/15	231	140	194	131	70	236	105	150	190	115	150	20	15	40	18	6X3.5	60	28	8X4	15
80	1/20	261	160	214	142	80	268	120	170	220	135	180	20	15	50	22	6X3.5	65	32	10X5	20
100	1/25	322	190	254	169	100	336	150	190	270	155	220	25	15	50	25	8X4	75	38	10X5	35
120	1/30	381	229	282	190	120	430	180	230	320	180	260	30	18	65	30	8X4	85	45	14X3.5	60
135	1/40	433	260	317	210	135	480	215	250	350	200	290	30	18	75	35	10X5	95	55	16X6	80
155	1/50	504	302	382	252	155	531	235	275	390	220	320	35	21	85	40	12X5	110	60	18X7	110
175	1/60	545	325	402	262	175	600	260	310	430	250	350	40	21	85	45	14X5.5	110	65	18X7	150
200		587	350	487	305	200	666	290	360	480	290	390	40	24	95	50	14X5.5	125	70	20X7.5	215
250		705	420	552	390	250	800	350	460	560	380	480	45	28	110	60	18X7	155	90	25X9	390

WP 系列蜗轮蜗杆减速机




WPX 型





WPO 型



WPX 轴指向表示
SHAFT DIRECTION



WPO 轴指向表示
SHAFT DIRECTION

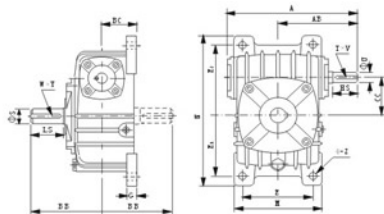



型号 size	减速比 ratio	输入轴 input shaft												出力轴 output shaft			重量 weight(kg)			
		A	AB	BB	BC	CC	M	N	E	E ₁	E ₂	G	Z	HS	U	T×V		LS	S	W×Y
40	1/10	143	87	74	45	40	94	184	70	74	98	10	10	25	12	4×2.5	28	14	5×3	5
50		175	107	97	50	50	116	220	90	93	102	15	12	30	12	4×2.5	40	17	5×3	6
60		198	122	112	55	60	128	260	100	105	120	20	12	40	15	5×3	50	22	6×3.5	10
70		1/15	231	140	131	65	70	156	295	120	120	135	20	15	40	18	6×3.5	60	28	8×4
80	1/20	261	160	142	70	80	175	320	140	130	150	20	15	50	22	6×3.5	65	32	10×5	20
100	1/25	322	190	169	90	100	224	375	190	155	180	26	15	50	25	8×4	75	38	10×5	35
120	1/30	381	229	190	100	120	266	450	220	185	215	30	18	65	30	8×4	85	45	14×5.5	50
135	1/40	433	260	210	110	135	306	495	280	210	235	30	18	75	35	10×5	95	56	16×6	75
155	1/50	504	302	252	140	155	350	590	290	245	295	35	21	85	40	12×5	110	60	18×7	115
175		545	325	262	150	175	394	640	320	267	323	40	21	85	45	14×5.5	110	65	18×7	140
200		587	350	305	175	200	440	710	370	290	360	40	24	95	50	14×5.5	125	70	20×7.5	200
250		705	420	390	200	250	510	860	440	350	440	45	28	110	60	18×7	155	90	25×9	340

WPDA 型



轴指向表示 SHAFT DIRECTION




型号	输入功率	减速比	电机法兰 flange												入力孔 input hole				出力轴 output shaft				重量			
size	input (kw)		A	AB	BB	CC	H	HL	M	N	E	F	G	Z	LA	LB	LC	LE	LZ	Q	U	T×V		LS	S	W×Y
40	0.18	1/10	151	88	97	50	176	80	120	140	95	110	15	12	115	95	140	4	M8	31	11	4×12.8	40	17	5×3	8
60	0.37		167	91	112	60	204	80	130	150	105	120	20	12	130	110	160	4	M8	33	14	5×16.3	50	22	6×3.5	11
70	0.37		202	111	131	70	236	70	150	100	115	150	20	15	130	110	180	4	M10	40	14	5×16.3	60	28	8×4	17
80	0.75		225	125	142	80	268	80	170	220	135	180	20	15	165	130	200	4.5	M10	48	19	6×21.8	65	32	10×5	22
100	1.5		280	148	169	100	336	100	190	270	155	220	25	15	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5	38
120	2.2	1/20	333	181	190	120	430	120	230	320	180	260	30	18	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5	64
135	3.0		375	202	210	135	480	135	250	350	200	290	30	18	215	180	250	5	M12	63	28	8×31.3	95	55	16×6	85
155	5.5		448	247	252	155	531	135	275	390	220	320	35	21	265	230	300	5	M12	83	36	10×41.3	110	60	18×7	118
175	7.5		481	262	262	175	600	160	310	430	250	350	40	21	265	230	300	5	M12	83	36	10×41.3	110	65	18×7	165
200	11.0		1/30	543	285	305	200	666	175	360	480	260	390	40	24	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5
250	15.0	615		330	360	250	800	200	460	590	360	480	45	28	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	396




WP 系列蜗轮蜗杆减速机

WPDS 型

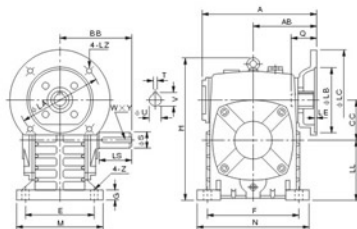

轴指向表示 SHAFT DIRECTION




型号 size	输入功率 input (kw)	减速比 ratio	A	AB	BB	CC	H	LL	M	N	E	F	G	Z	电机法兰 flange				入力孔 input hole				出力轴 output shaft				重量 weight (kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y		
50	0.18	1/10	151	83	97	50	176	80	120	140	95	110	15	12	115	95	140	4	M8	31	11	4 × 12.8	40	17	5 × 3	8	
60	0.37		167	91	112	60	202	90	130	150	105	120	20	12	130	110	160	4	M8	33	14	5 × 16.3	50	22	6 × 3.5	11	
70	0.75		200	109	131	70	238	105	150	160	115	150	20	15	130	110	160	4	M8	40	14	5 × 16.3	60	28	8 × 4	17	
80	1.5		202	111											165	130	200	4	M10	42	19	6 × 21.8					
100	1.5	1/20	225	125	142	80	273	120	170	220	135	180	20	15	165	130	200	4.5	M10	52	24	8 × 27.3	65	32	10 × 5	22	
120	2.2		280	148	169	100	334	150	190	270	155	220	25	15	165	130	200	4.5	M10	52	24	8 × 27.3	75	38	10 × 5	38	
135	3.0	1/30	333	181	190	120	423	180	230	320	180	260	30	18	215	180	250	5	M12	63	28	8 × 31.3	85	45	10 × 5.5	64	
155	5.5		375	202	210	135	462	215	250	350	200	290	30	18	215	180	250	5	M12	63	28	8 × 31.3	95	55	14 × 5.5	85	
175	7.5	1/50	448	247	252	155	541	235	275	360	220	320	35	21	265	230	300	5	M12	83	38	10 × 41.3	110	60	16 × 6	118	
200	11.0		481	262	262	175	600	260	310	430	250	350	40	21	265	230	300	5	M12	83	38	10 × 41.3	110	65	18 × 7	165	
250	15.0		543	285	305	200	677	290	360	480	290	390	40	24	300	250	350	6	M16	114	42	12 × 45.3	125	70	20 × 7.5	236	
			615	330	360	250	824	350	480	560	380	480	45	28	300	250	350	6	M16	114	42	12 × 45.3	155	90	25 × 9	396	


WPDX 型




WPDO 型



WPDX 轴指向表示
SHAFT DIRECTION






WPDO 轴指向表示
SHAFT DIRECTION




型号 size	输入功率 input (kw)	减速比 ratio	A	AB	BB	BC	CC	M	N	E	E ₁	E ₂	G	Z	电机法兰 flange				入力孔 input hole				出力轴 output shaft				重量 weight (kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y		
50	0.18	1/10	151	83	97	50	50	116	220	90	99	102	15	12	115	95	140	4	M8	31	11	4 × 12.8	40	17	5 × 3	8	
60	0.37		167	91	112	55	60	126	260	100	105	120	20	12	130	110	160	4	M8	33	14	5 × 16.3	50	22	6 × 3.5	11	
70	0.75		200	109	131	65	70	156	295	120	120	135	20	15	130	110	160	4	M8	40	14	5 × 16.3	60	28	8 × 4	17	
80	1.5		202	111											165	130	200	4	M10	48	19	6 × 21.8					
100	1.5	1/20	225	125	142	70	80	175	320	140	130	150	20	15	165	130	200	4.5	M10	52	24	8 × 27.3	65	32	10 × 5	22	
120	2.2		280	148	169	90	100	224	375	150	155	180	25	15	165	130	200	4.5	M10	52	24	8 × 27.3	75	38	10 × 5	38	
135	3.0	1/30	333	181	190	100	120	266	450	220	185	215	30	18	215	180	250	5	M12	63	28	8 × 31.3	85	45	14 × 5.5	64	
155	5.5		375	202	210	110	135	306	495	260	210	235	30	18	215	180	250	5	M12	63	28	8 × 31.3	95	55	16 × 6	85	
175	7.5	1/50	448	247	252	140	155	350	590	290	245	265	35	21	265	230	300	5	M12	83	38	10 × 41.3	110	60	18 × 7	118	
200	11.0		481	262	262	150	175	394	640	320	267	323	40	21	265	230	300	5	M12	83	38	10 × 41.3	110	65	18 × 7	165	
250	15.0		543	285	305	175	200	440	710	370	290	360	40	24	300	250	350	6	M16	114	42	12 × 45.3	125	70	20 × 7.5	236	
300	22.0		615	330	360	200	250	510	860	440	350	440	45	28	300	250	350	6	M16	114	42	12 × 45.3	155	90	25 × 9	396	



WPW 型



轴指向表示 SHAFT DIRECTION





型号 size	减速比 ratio	A	AB	B	BB	AC	BC	AD	BD	CC	HL	H	Z×L	入力轴 input shaft			出力轴 output shaft			重量 weight(kg)
														HS	U	T×V	LS	S	W×Y	
40		149	89	124	79	95	61	78	42	40	35	125	M8×12	25	12	4×2.5	28	14	5×3	4
50		175	107	150	97	111	68	85	50	50	35	150	M8×18	30	12	4×2.5	40	17	5×3	6.5
60	1/10	198	122	168	112	127	76	105	55	60	42	177	M8×20	40	15	5×3	50	22	6×3.5	9
70	1/15	231	140	194	131	152	86	125	65	70	55	215	M10×25	40	18	6×3.5	60	28	8×4	13
80	1/20	261	160	214	142	169	102	140	70	80	65	250	M12×28	50	22	6×3.5	65	32	10×5	21
100	1/25	322	190	254	169	216	117	180	90	100	80	310	M12×30	50	25	8×4	75	38	10×5	34
120	1/30	381	220	282	190	256	124	220	100	120	95	370	M14×32	65	30	8×4	85	45	14×5.5	51
135	1/40	433	260	317	210	296	147	260	110	135	105	425	M16×35	75	35	10×5	95	55	16×8	78
155	1/50	504	302	382	252	345	165	280	120	155	103	481	M18×35	85	40	12×5	110	60	18×7	102
175	1/60	545	325	402	262	374	192	320	140	175	123	521	M18×35	85	45	14×5.5	110	65	18×7	142
200		587	350	467	305	412	230	360	150	200	130	575	M20×38	95	50	14×5.5	125	70	20×7.5	202
250		705	420	552	390	500	285	420	190	250	150	700	M24×42	110	60	18×7	155	90	25×9	340


WPWA 型



WPWS 型



轴指向表示 SHAFT DIRECTION



型号 size	减速比 ratio	A	AB	B	BB	AC	BC	CC	HL	LL	H	M	N	E	F	G	Z	入力轴 input shaft			出力轴 output shaft			重量 weight(kg)
		HS	U	T×V	LS	S	W×Y																	
40	1/10	149	80	124	79	95	61	40	45	60	135	100	130	80	110	10	10	25	12	4×2.5	28	14	5×3	4.5
50		175	107	150	97	111	68	50	50	60	165	120	140	95	110	15	12	30	12	4×2.5	40	17	5×3	7.5
60		198	122	168	112	127	76	60	60	93	195	130	150	105	120	18	12	40	15	5×3	50	22	6×3.5	11.5
70	1/15	231	140	194	131	152	86	70	73	108	233	150	190	115	150	18	15	40	18	6×3.5	60	28	8×4	15.5
80	1/20	261	160	214	142	169	102	80	83	123	268	170	220	135	180	18	15	50	22	6×3.5	65	32	10×5	24
100	1/25	322	190	254	169	216	117	100	100	150	330	190	270	155	220	20	15	50	25	8×4	75	38	10×5	39
120	1/30	381	220	282	190	256	124	120	120	180	395	230	320	180	260	25	18	65	30	8×4	85	45	14×5.5	57
135	1/40	433	260	317	210	296	147	135	135	215	455	250	350	200	290	30	18	75	35	10×5	95	55	16×8	85
155	1/50	504	302	382	252	345	185	155	135	235	493	280	390	220	320	32	21	85	40	12×5	110	60	18×7	110
175	1/60	545	325	402	262	374	192	175	160	260	558	310	410	250	350	37	21	85	45	14×5.5	110	65	18×7	152
200		587	350	467	305	412	230	200	175	290	620	355	445	290	390	45	24	95	50	14×5.5	125	70	20×7.5	216
250		705	420	552	390	500	285	250	200	350	750	480	560	380	480	50	28	110	60	18×7	155	90	25×9	350




WP 系列蜗轮蜗杆减速机


WPWX 型




WPWO 型

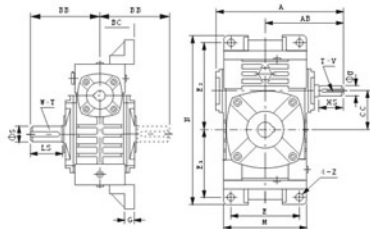

WPWX 轴指向表示
SHAFT DIRECTION



WPWO 轴指向表示
SHAFT DIRECTION




型号 size	减速比 ratio	A	AB	BB	BC	CC	M	N	E	E ₁	E ₂	G	Z	入力轴 input shaft			出力轴 output shaft			重量 weight(kg)
														HS	U	T×V	LS	S	W×Y	
40		140	80	70	45	40	65	187	70	72	97	12	10	25	12	4×2.5	28	14	5×3	5
50	1/10	175	107	97	50	50	111	225	90	90	110	14	12	30	12	4×2.5	40	17	5×3	8
60		198	122	112	55	60	127	257	100	102	120	15	12	40	15	5×3	50	22	6×3.5	11
70	1/15	231	140	131	65	70	152	305	120	120	155	20	15	40	18	6×3.5	60	28	8×4	15.5
80	1/20	261	160	142	70	80	174	350	140	140	180	20	15	50	22	6×3.5	65	32	10×5	24
100	1/25	322	190	189	90	100	224	410	190	185	215	22	15	50	25	8×4	75	38	10×5	38
120	1/30	381	220	190	100	120	264	494	220	195	255	25	19	65	30	8×4	85	45	14×5.5	56
135		433	260	210	110	135	304	550	260	230	285	30	19	75	35	10×5	95	55	16×6	84
155	1/50	504	302	252	140	155	345	605	290	250	305	35	21	85	40	12×5	110	60	18×7	120
175	1/60	545	325	262	150	175	374	675	320	273	348	40	21	85	45	14×5.5	110	65	18×7	157
200		587	350	305	175	200	424	740	370	305	390	40	24	95	50	14×5.5	125	70	20×7.5	224
250	1/80	705	420	352	200	250	510	920	440	375	475	45	28	110	60	18×7	155	90	25×9	374


WPWT 型




WPWV 型

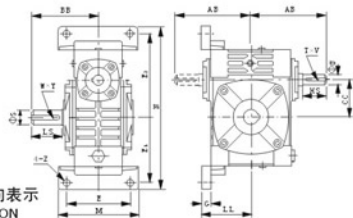

WPWT 轴指向表示
SHAFT DIRECTION




WPWV 轴指向表示
SHAFT DIRECTION




型号 size	减速比 ratio	AB	BB	CC	LL	M	N	E	E ₁	E ₂	G	Z	入力轴 input shaft			出力轴 output shaft			重量 weight(kg)
													HS	U	T×V	LS	S	W×Y	
40		87	79	40	83	90	187	70	72	97	12	10	25	12	4×2.5	28	14	5×3	5
50	1/10	107	97	50	70	120	225	90	90	110	14	12	30	12	4×2.5	40	17	5×3	8
60		122	112	60	80	130	257	105	102	120	15	12	40	15	5×3	50	22	6×3.5	11
70	1/15	140	131	70	95	150	305	115	120	155	20	15	40	18	6×3.5	60	28	8×4	15.5
80	1/20	160	142	80	105	170	350	135	140	180	20	15	50	22	6×3.5	65	32	10×5	24
100	1/25	190	160	100	135	190	410	155	185	215	22	15	50	25	8×4	75	38	10×5	38
120	1/30	220	190	120	160	230	494	180	195	255	25	19	65	30	8×4	85	45	14×5.5	56
135		260	210	135	185	250	550	200	230	285	30	19	75	35	10×5	95	55	16×6	84
155	1/50	302	252	155	220	275	605	220	250	305	35	21	85	40	12×5	110	60	18×7	120
175	1/60	325	262	175	240	310	675	250	273	348	40	21	85	45	14×5.5	110	65	18×7	157
200		350	305	200	280	390	740	290	305	390	40	24	95	50	14×5.5	125	70	20×7.5	224
250	1/80	420	352	250	315	490	920	390	375	475	45	28	110	60	18×7	155	90	25×9	374



WPWD 型

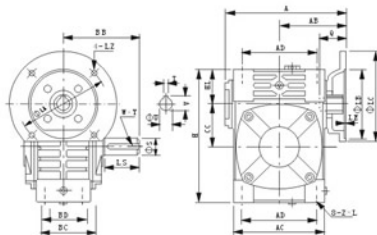

轴指向表示 SHAFT DIRECTION




型号 size	输入功率 input (kw)	减速比 ratio	A	AB	BB	AC	BC	AD	BD	CC	HL	H	Z×L	电机法兰 flange				入力孔 input hole			出力轴 output shaft			重量 weight (kg)	
40	0.12	1/10	135	75	70	95	61	78	42	40	35	125	M6×12	115	95	140	4	M6	31	11	4×12.8	28	14	5×3	4
50	0.18		151	83	97	111	68	85	50	50	35	150	M6×18	115	95	140	4	M6	31	11	4×12.8	40	17	5×3	7
60	0.37		167	91	112	127	76	105	55	60	42	177	M6×20	130	110	160	4	M6	33	14	5×16.3	50	22	6×3.5	10
70	0.75		200	100	120	140	80	110	60	65	50	200	M10×25	165	130	200	4	M10	42	19	6×21.8	60	28	8×4	14.5
80	0.75	1/15	225	125	141	159	102	140	70	80	65	250	M12×28	165	130	200	4.5	M10	48	19	6×21.8	65	32	10×5	23
100	1.5		260	148	169	216	117	160	90	100	80	310	M12×30	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5.5	36.5
120	2.2	1/25	333	181	190	256	124	220	100	120	95	370	M14×32	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5	54
135	3.0		375	202	210	296	147	260	110	135	105	425	M16×35	215	180	250	5	M12	63	28	8×31.3	95	55	16×6	83
155	5.5	1/50	448	247	252	345	165	280	120	155	108	461	M16×35	265	230	300	5	M12	83	38	10×41.3	110	60	18×7	110
175	7.5		481	262	262	374	192	320	140	175	123	521	M16×35	265	230	300	5	M12	83	38	10×41.3	110	65	18×7	156
200	11.0	1/60	543	285	305	412	230	360	150	200	130	575	M20×36	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5	222
250	15.0		615	330	360	500	285	420	190	250	150	700	M24×42	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	376


WPWDA 型



WPWDS 型

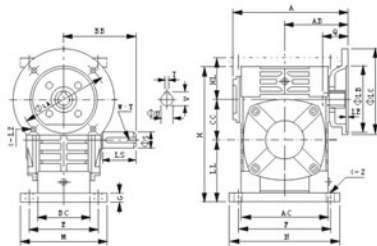

轴指向表示 SHAFT DIRECTION



型号 size	输入功率 input (kw)	速比 ratio	A	AB	BB	AC	BC	CC	HL	LL	H	M	N	E	F	G	Z	电机法兰 flange	入力孔 input hole	出力轴 output shaft	重量 weight (kg)								
40	0.12	1/10	135	75	79	95	61	40	45	60	135	100	130	80	110	10	10	115	95	140	4	M6	31	11	4×12.8	28	14	5×3	5
50	0.18		151	83	97	111	68	50	50	60	165	120	140	95	110	15	12	115	95	140	4	M6	31	11	4×12.8	40	17	5×3	8
60	0.37		167	91	112	127	76	60	60	98	195	130	105	120	18	12	130	110	160	4	M6	33	14	5×16.3	50	22	6×3.5	12.5	
70	0.37		200	109	130	151	86	70	73	108	233	150	100	115	150	15	15	165	130	160	4	M6	40	19	4×16.3	60	28	8×4	17
70	0.75		202	111	131	152	86	70	73	108	233	150	100	115	150	15	15	165	130	200	4	M10	42	19	6×21.8	60	28	8×4	17
80	0.75		225	125	142	169	102	80	83	123	268	170	220	135	160	18	15	165	130	200	4.5	M10	48	19	6×21.8	65	32	10×5	26
100	1.5		260	148	169	216	117	100	100	150	330	190	270	155	220	20	15	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5.5	41.5
120	2.2		333	181	190	256	124	120	120	180	365	230	320	180	260	25	18	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5	60
135	3.0		375	202	210	296	147	135	135	215	455	250	350	200	290	30	18	215	180	250	5	M12	63	28	8×31.3	95	55	16×6	90
155	5.5		448	247	252	345	165	155	155	135	235	490	280	360	220	320	32	21	265	230	300	5	M12	83	38	10×41.3	110	60	18×7
175	7.5	481	262	262	374	192	175	160	260	538	310	410	250	350	37	21	265	230	300	5	M12	83	38	10×41.3	110	65	18×7	167	
200	11.0	543	285	305	412	230	200	175	260	620	355	445	290	390	45	24	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5	237	
250	15.0	615	330	360	500	285	250	200	350	750	460	560	360	480	50	28	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	395	




WP 系列蜗轮蜗杆减速机


WPWDX 型





WPWDX 轴指向表示
SHAFT DIRECTION



WPWDO 型



WPWDO 轴指向表示
SHAFT DIRECTION




型号 size	输入功率 input (kw)	减速比 ratio	A	AB	BB	BC	CC	M	N	E	E ₁	E ₂	G	Z	电机法兰 flange				入力孔 input hole				出力轴 output shaft				重量 weight(kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y		
40	0.12		135	75	79	45	40	55	187	70	72	97	12	10	115	65	140	4	M8	31	11	4×12.8	28	14	5×3	5.4	
50	0.18		151	83	97	50	50	113	226	90	90	110	14	12	115	65	140	4	M8	31	11	4×12.8	40	17	5×3	8.5	
60	0.37		167	91	112	55	60	127	257	100	102	120	15	12	130	110	160	4	M8	33	14	5×16.3	50	22	6×3.5	12	
70	0.37	1/10	200	109	131	65	70	152	305	120	120	155	20	15	130	110	160	4	M8	40	14	5×16.3	60	28	8×4	17	
80	0.75	1/20	202	111	109	65	70	152	305	120	120	155	20	15	130	110	160	4	M10	42	19	6×21.8	65	32	10×5	26	
100	1.5	1/25	225	125	142	70	80	174	350	140	140	180	20	15	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5	40.5	
120	2.2	1/30	280	148	169	90	100	224	410	160	165	215	22	15	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5	40.5	
135	3.0	1/40	333	181	190	100	120	264	494	220	195	255	25	18	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5	59	
155	5.5	1/50	375	202	210	110	135	304	550	260	230	285	30	18	215	180	250	5	M12	63	28	8×31.3	95	55	16×6	89	
175	7.5	1/60	448	247	252	140	155	345	605	260	250	305	35	21	265	230	300	5	M12	83	38	10×41.3	110	60	18×7	138	
200	11.0		481	262	262	150	175	374	675	300	273	348	40	21	265	230	300	5	M12	83	38	10×41.3	110	65	18×7	172	
250	15.0		543	285	305	175	200	428	740	370	305	380	40	21	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5	246	
			615	330	360	200	250	510	920	440	375	475	45	28	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	410	

WPWDT 型





WPWDT 轴指向表示
SHAFT DIRECTION



WPWDV 型



WPWDV 轴指向表示
SHAFT DIRECTION






型号 size	输入功率 (kW)	减速比 ratio	AC	BB	CC	LL	M	N	E	E ₁	E ₂	G	Z	电机法兰 flange				入力孔 input hole				出力轴 output shaft				重量 weight
														LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y		
40	0.12		75	79	40	68	90	187	70	72	97	12	10	115	65	140	4	M8	31	11	4×12.8	28	14	5×3	5.4	
50	0.18		83	97	50	70	120	226	90	90	110	14	12	115	65	140	4	M8	31	11	4×12.8	40	17	5×3	8.5	
60	0.37		91	112	60	80	130	257	105	102	129	15	12	130	110	160	4	M8	33	14	5×16.3	50	22	6×3.5	12	
70	0.37		109	131	70	95	150	305	115	120	155	20	15	130	110	160	4	M8	40	14	5×16.3	60	28	8×4	17	
80	0.75	1/10	111											165	130	200	4	M10	42	19	6×21.8	60	28	8×4	17	
100	1.5	1/20	125	142	80	105	170	350	135	140	180	20	15	165	130	200	4.5	M10	52	24	8×27.3	65	32	10×5	26	
120	2.2	1/25	148	169	100	135	190	410	155	165	215	22	15	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5	40.5	
135	3.0	1/30	181	190	120	160	230	494	180	195	255	25	18	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5	59	
155	5.5	1/40	202	210	135	185	250	559	200	230	285	30	18	215	180	250	5	M12	63	28	8×31.3	95	55	16×6	89	
175	7.5	1/50	247	252	155	220	275	605	260	250	305	35	21	265	230	300	5	M12	83	38	10×41.3	110	60	18×7	138	
200	11.0	1/60	262	262	175	240	310	675	250	273	348	40	21	265	230	300	5	M12	83	38	10×41.3	110	65	18×7	172	
250	15.0		285	305	200	280	360	749	290	305	380	40	24	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5	246	
300	18.0		330	360	250	315	460	920	380	375	475	45	28	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	400	


WP 系列蜗轮蜗杆减速机



WPWK 型





轴指向表示 SHAFT DIRECTION




型号 size	减速比 ratio	A	AB	B	AC	BC	AD	BD	CC	HL	H	Z×L	入力轴 input shaft			出力轴 output shaft		重量 weight(kg)
													HS	U	T×V	S	W×Y	
40		149	89	90	95	124	78	42	40	35	125	M8×12	25	12	4×2.5	16	5×18.3	4
50		175	107	110	111	150	85	50	50	35	150	M8×18	30	12	4×2.5	20	6×22.8	6.5
60	1/10	198	122	120	127	168	105	55	60	42	177	M8×20	40	15	5×3	25	8×28.3	9
70	1/15	231	140	132	152	194	125	65	70	55	215	M10×25	40	18	6×3.5	30	8×33.3	13
80	1/20	261	160	150	169	214	140	70	80	65	250	M12×28	50	22	6×3.5	35	10×38.3	21
100	1/25	322	190	174	216	254	180	90	100	80	310	M12×30	50	25	8×4	40	12×43.3	34
120	1/30	381	220	180	256	282	220	100	120	95	370	M14×32	65	30	8×4	45	14×48.8	51
135	1/40	433	260	214	296	317	280	110	135	105	425	M16×35	75	35	10×6	60	18×64.4	78
155	1/50	504	302	256	345	382	280	120	155	109	481	M16×35	85	40	12×6	70	20×74.9	102
175	1/60	545	325	282	374	402	320	140	175	123	521	M16×35	85	45	14×5.5	80	22×85.4	142
200		587	350	324	412	467	360	150	200	130	575	M20×36	95	50	14×5.5	85	22×90.4	202
250		705	420	400	500	552	420	190	250	150	700	M24×42	110	80	18×7	110	28×116.4	340

WPWKA 型

WPWKS 型



轴指向表示 SHAFT DIRECTION




型号 size	减速比 ratio	A	AB	B	AC	BC	CC	HL	LL	H	M	N	E	F	G	Z	入力轴 input shaft		出力轴 output shaft		重量 weight(kg)	
		HS	U	T×V	S	W×Y																
40		149	89	90	95	61	40	45	60	135	100	130	80	110	10	10	25	12	4×2.5	16	5×18.3	4.5
50	1/10	175	107	110	111	68	50	50	80	165	120	140	95	110	15	12	30	12	4×2.5	20	6×22.8	7.5
60	1/15	198	122	120	127	76	60	60	93	195	130	150	105	120	18	12	40	15	5×3	25	8×28.3	11.5
70	1/20	231	140	132	152	86	70	73	108	233	150	100	115	150	18	15	40	18	6×3.5	30	8×33.3	15.5
80	1/25	261	160	150	169	102	80	83	123	268	170	220	135	180	18	15	50	22	6×3.5	35	10×38.3	24
100	1/30	322	190	174	216	117	100	100	150	330	190	270	155	220	20	15	50	25	8×4	40	12×43.3	39
120	1/40	381	220	180	256	124	120	120	180	365	230	320	180	260	25	18	65	30	8×4	45	14×48.8	57
135	1/50	433	260	214	296	147	135	135	215	455	250	350	200	290	30	18	75	35	10×5	60	18×64.4	85
155	1/60	504	302	256	345	165	155	135	235	493	280	380	220	320	32	21	85	40	12×6	70	20×74.9	110
175		545	325	282	374	192	175	180	260	558	310	410	250	350	37	21	85	45	14×5.5	80	22×85.4	152
200		587	350	324	412	230	200	175	290	620	355	445	290	390	45	24	95	50	14×5.5	85	22×90.4	216
250		705	420	400	500	285	250	200	350	750	480	590	380	490	50	28	110	80	18×7	110	28×116.4	350




WP 系列蜗轮蜗杆减速机

WPWKO 型

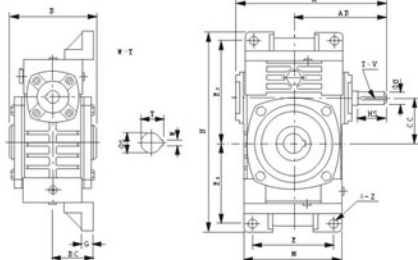



轴指向表示 SHAFT DIRECTION




型号 size	减速比 ratio	A	AB	B	BC	CC	M	N	E	E ₁	E ₂	G	Z	入力轴 input shaft			出力轴 output shaft		重量 weight (kg)
40		149	80	90	45	40	95	187	70	72	97	12	10	25	12	4×2.5	18	5×18.3	5
50		175	107	110	50	50	111	228	90	90	110	14	12	30	12	4×2.5	20	6×22.8	8
60	1/10	198	122	120	55	60	127	257	100	102	129	15	12	40	15	5×3	25	8×28.3	11
70	1/15	231	140	132	65	70	152	305	120	120	155	20	15	40	18	6×3.5	30	8×33.3	15.5
80		261	160	150	70	80	174	350	140	140	180	20	15	50	22	6×3.5	35	10×38.3	24
100	1/25	322	190	174	90	100	224	410	190	185	215	22	15	50	25	8×4	40	12×43.3	38
120	1/30	381	229	180	100	120	264	494	220	195	255	25	18	65	30	8×4	45	14×48.8	56
135	1/40	433	260	214	110	135	304	559	260	230	285	30	18	75	35	10×5	60	18×64.4	84
155	1/50	504	302	256	120	155	345	605	290	250	315	35	21	85	40	12×5	70	20×74.9	129
175		545	335	282	130	175	374	675	320	275	348	40	21	85	45	14×5.5	80	22×85.4	157
200		587	350	324	175	200	424	749	370	305	390	40	24	95	50	14×5.5	85	22×90.4	224
250		705	420	400	200	250	510	920	440	375	475	45	28	110	60	18×7	110	28×116.4	374

WPWKT 型

WPWKV 型

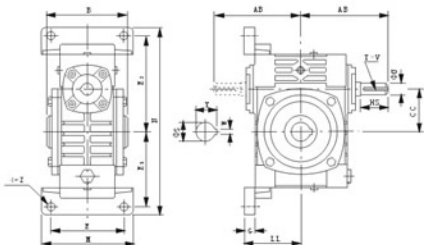

轴指向表示 SHAFT DIRECTION




型号 size	减速比 ratio	AB	B	CC	LL	M	N	E	E ₁	E ₂	G	Z	入力轴 input shaft			出力轴 output shaft		重量 weight (kg)
40		87	90	40	83	90	187	70	72	97	12	10	25	12	4×2.5	16	5×18.3	5
50		107	110	50	70	120	228	95	90	110	14	12	30	12	4×2.5	20	6×22.8	8
60	1/10	122	120	60	80	130	257	105	102	129	15	12	40	15	5×3	25	8×28.3	11
70	1/15	140	132	70	95	150	305	115	120	155	20	15	40	18	6×3.5	30	8×33.3	15.5
80		160	150	80	105	170	350	135	140	180	20	15	50	22	6×3.5	35	10×38.3	24
100	1/25	190	174	100	135	190	410	155	165	215	22	15	50	25	8×4	40	12×43.3	38
120	1/30	229	180	120	160	230	494	180	195	255	25	18	65	30	8×4	45	14×48.8	56
135	1/40	260	214	135	185	250	559	200	230	285	30	18	75	35	10×5	60	18×64.4	84
155	1/50	302	256	155	220	275	605	220	250	315	35	21	85	40	12×5	70	20×74.9	129
175		325	282	175	240	310	675	250	275	348	40	21	85	45	14×5.5	80	22×85.4	157
200		350	324	200	280	380	749	290	305	390	40	24	95	50	14×5.5	85	22×90.4	224
250		420	400	250	315	490	920	380	375	475	45	28	110	60	18×7	110	28×116.4	374


WP 系列蜗轮蜗杆减速机



WPWDK 型



轴指向表示 SHAFT DIRECTION





型号 size	输入功率 input (kW)	减速比 ratio	A	AB	BB	AC	BC	AD	BD	CC	HL	H	Z×L	电机法兰 flange	入力孔 input hole	出力轴 output shaft	重量 weight (kg)	
40	0.12	1/10	135	75	90	95	61	78	42	40	35	125	M6×12	115 95 140 4	M8 31 11	4×12.8	9 5×18.3	4
50	0.18		151	83	110	111	68	85	50	35	150	M6×18	115 95 140 4	M8 31 11	4×12.8	20 6×22.6	7	
60	0.37		167	91	120	127	75	105	55	60	42	177	M8×20	130 110 150 4	M8 33 14	5×15.3	25 8×28.3	10
70	0.55		202	109	132	132	86	125	65	70	55	215	M10×25	155 130 200 4	M10 42 19	6×21.8	30 8×33.3	14.5
80	0.75	1/15	225	125	150	160	102	140	70	80	65	250	M12×28	165 130 200 4.5	M10 48 19	6×21.8	25 10×38.3	23
100	1.5		260	148	174	216	117	160	90	100	80	310	M12×30	165 130 200 4.5	M10 52 24	8×27.3	40 12×48.3	36.5
120	2.2		333	181	180	256	124	220	100	120	95	370	M14×32	215 180 250 5	M12 63 28	8×31.3	45 14×48.8	54
135	3.0		375	202	214	296	147	260	110	135	105	425	M16×35	215 180 250 5	M12 63 28	8×31.3	60 18×64.4	83
155	5.5	1/60	448	247	256	345	185	260	120	155	103	461	M16×35	265 230 300 5	M12 83 38	10×41.3	70 20×74.9	110
175	7.5		481	262	282	374	192	320	140	175	123	521	M16×35	265 230 300 5	M12 83 38	10×41.3	80 22×85.4	156
200	11.0		543	285	324	412	230	360	150	200	130	575	M20×36	300 250 350 6	M16 114 42	12×45.3	85 22×90.4	222
250	15.0		615	330	400	500	285	420	190	250	150	700	M24×42	300 250 350 6	M16 114 42	12×45.3	110 28×116.4	376


WPWDKA 型



WPWDKS 型



轴指向表示 SHAFT DIRECTION



型号 size	输入功率 input (kW)	减速比 ratio	A	AB	B	AC	BC	CC	HL	LL	H	M	N	E	F	G	Z	电机法兰 flange				入力孔 input hole		出力轴 output shaft		重量 weight (kg)		
																		LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40	0.12	1/10	135	75	90	95	61	40	45	50	135	100	130	80	110	10	10	115	95	140	4	M8	31	11	4×12.8	5	5×18.3	5
50	0.18		151	83	110	111	68	50	50	50	165	120	140	95	110	15	12	115	95	140	4	M8	31	11	4×12.8	8	5×22.6	8
60	0.37		167	91	120	127	75	60	60	60	195	130	150	105	120	18	12	130	110	160	4	M8	33	14	5×15.3	25	8×28.3	12.5
70	0.55		202	109	132	132	86	70	73	106	233	150	180	115	150	18	15	130	110	160	4	M8	40	14	5×15.3	30	8×33.3	17
80	0.75	1/15	225	125	150	160	102	80	83	123	268	170	220	135	160	18	15	165	130	200	4.5	M10	42	19	6×21.8	35	10×38.3	26
100	1.5		260	148	174	216	117	100	100	150	330	190	270	155	220	20	15	165	130	200	4.5	M10	52	24	8×27.3	40	12×43.3	41.5
120	2.2		333	181	180	256	124	120	120	180	365	230	320	180	260	25	18	215	180	250	5	M12	63	28	8×31.3	45	14×48.8	60
135	3.0		375	202	214	296	147	135	135	215	455	250	350	200	290	30	18	215	180	250	5	M12	63	28	8×31.3	60	18×64.4	90
155	5.5	1/60	448	247	256	345	185	155	135	235	460	260	360	220	320	32	21	265	230	300	5	M12	83	38	10×41.3	70	20×74.9	118
175	7.5		481	262	282	374	192	175	160	260	558	310	410	250	350	37	21	265	230	300	5	M12	83	38	10×41.3	80	22×85.4	167
200	11.0		543	285	324	412	230	200	175	200	620	355	445	200	360	45	24	300	250	350	6	M16	114	42	12×45.3	85	22×90.4	237
250	15.0		615	330	400	500	285	250	200	350	750	460	560	380	480	50	28	300	250	350	6	M16	114	42	12×45.3	110	28×116.4	395





WP 系列蜗轮蜗杆减速机

WPWDKO 型



轴指向表示 SHAFT DIRECTION

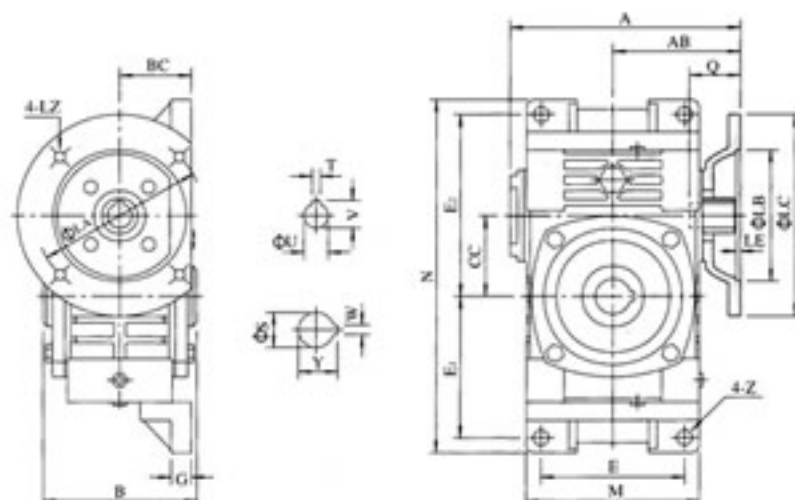

型号 size	入功率 input (kw)	减速比 ratio	A	AB	BB	BC	CC	M	N	E	E ₁	E ₂	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft		重量 weight(kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40	0.12	1/10	135	75	90	45	40	95	187	70	72	97	12	10	115	95	140	4	M8	31	11	4×12.8	16	5×18.3	5.4
50	0.18		151	83	110	50	50	111	226	90	90	110	14	12	115	95	140	4	M8	31	11	4×12.8	20	6×22.8	8.5
60	0.37		167	91	120	55	60	127	257	100	102	129	15	12	130	110	160	4	M8	33	14	5×16.3	25	8×28.3	12
70	0.37	1/15	200	109	132	65	70	152	305	120	120	155	20	15	130	110	160	4	M8	40	14	5×16.3	30	8×33.3	17
	0.75		202	111											165	130	200		M10	42	19	6×21.8			
80	0.75	1/20	225	125	150	70	80	174	350	140	140	180	20	15	165	130	200	4.5	M10	48	19	6×21.8	35	10×38.3	26
	1.5		52	24	8×27.3																				
100	1.5	1/25	280	148	174	90	100	224	410	190	165	215	22	15	165	130	200	4.5	M10	52	24	8×27.3	40	12×43.3	40.5
120	2.2	1/30	333	181	180	100	120	264	494	220	195	255	25	18	215	180	250	5	M12	63	28	8×31.3	45	14×48.8	59
	3.0																								
135	3.0	1/40	375	202	214	110	135	304	559	260	230	285	30	18	215	180	250	5	M12	63	28	8×31.3	60	18×64.4	89
155	5.5	1/50	448	247	256	140	155	345	605	290	250	305	35	21	265	230	300	5	M12	83	38	10×41.3	70	20×74.9	138
175	5.5	1/60	481	262	282	150	175	374	675	320	273	348	40	21	265	230	300	5	M12	83	38	10×41.3	80	22×85.4	172
	7.5																								
200	11.0		543	285	324	175	200	424	749	370	305	390	40	21	300	250	350	6	M16	114	42	12×45.3	85	22×90.4	246
250	11.0		615	330	400	200	250	510	920	440	375	475	45	28	300	250	350	6	M16	114	42	12×45.3	110	28×116.4	410
	15.0																								



WPWDKT 型

WPWDKV 型



WPWDKT 轴指向表示
SHAFT DIRECTION

WPWDKV 轴指向表示
SHAFT DIRECTION

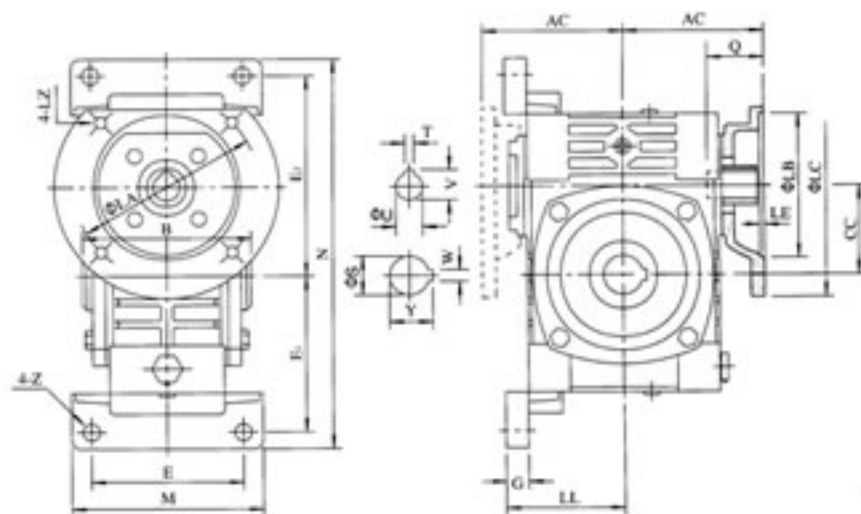

型号 size	入功率 input (kw)	减速比 ratio	AC	B	CC	LL	M	N	E	E ₁	E ₂	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft		重量 weight (kg)
														LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40	0.12	1/10 1/15 1/20 1/25 1/30 1/40 1/50 1/60	75	90	40	63	90	187	70	72	97	12	10	115	95	140	4	M8	31	11	4×12.8	16	5×18.3	5.4
50	0.18		83	110	50	70	120	226	95	90	110	14	12	115	95	140	4	M8	31	11	4×12.8	20	6×22.8	8.5
60	0.37		91	120	60	80	130	257	105	102	129	15	12	130	110	160	4	M8	33	14	5×16.3	25	8×28.3	12
70	0.37		109	132	70	95	150	305	115	120	155	20	15	130	110	160	4	M8	40	14	5×16.3	30	8×33.3	17
	0.75		111											165	130	200		M10	42	19	6×21.8			
80	0.75		125	150	80	105	170	350	135	140	180	20	15	165	130	200	4.5	M10	48	19	6×21.8	35	10×38.3	26
	1.5		52																24	8×27.3				
100	1.5		148	174	100	135	190	410	155	165	215	22	15	165	130	200	4.5	M10	52	24	8×27.3	40	12×43.3	40.5
120	2.2		181	180	120	160	230	494	180	195	255	25	18	215	180	250	5	M12	63	28	8×31.3	45	14×48.8	59
	3.0																							
135	3.0		202	214	135	185	250	559	200	230	285	30	18	215	180	250	5	M12	63	28	8×31.3	60	18×64.4	89
	4.0																							
155	5.5		247	256	155	220	275	605	220	250	305	35	21	265	230	300	5	M12	83	38	10×41.3	70	20×74.9	138
175	5.5		262	282	175	240	310	675	250	273	348	40	21	265	230	300	5	M12	83	38	10×41.3	80	22×85.4	172
	7.5																							
200	11.0		285	324	200	280	360	749	290	305	390	40	24	300	250	350	6	M16	114	42	12×45.3	85	22×90.4	246
250	11.0	330	400	250	315	460	920	380	375	475	45	28	300	250	350	6	M16	114	42	12×45.3	110	28×116.4	400	
	15.0																							



WP 系列蜗轮蜗杆减速机



WPDZ 型




轴指向表示 SHAFT DIRECTION

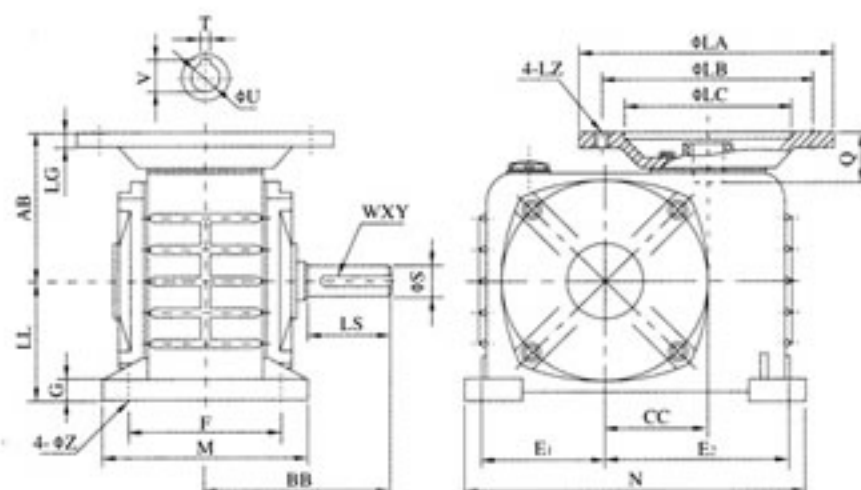

型号 size	入功率 input (kw)	减速比 ratio	AB	LL	BB	CC	E ₁	E ₂	F	G	N	M	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft			重量 weight(kg)
														LB	LC	LA	LG	LZ	Q	U	T×V	LS	S	W×Y	
50	0.18	1/5	88	77	95	50	53	77	100	15	160	125	11	115	95	140	10	M8	26	11	4×12.8	40	17	5×3	8
60	0.18		80	82	110	60	68	92	100	15	190	130	11	115	95	140	10	M8	27	11	4×12.8	50	22	7×4	12.5
	0.37	1/10												130	110	160			37	14	5×16.3				
70	0.37		100	95	130	70	75	115	120	20	230	155	15	130	110	160	10	M8	32	14	5×16.3	60	28	7×4	16
	0.75	1/15												165	130	200		M10	42	19	6×21.8				
80	0.75		120	100	140	80	96	144	125	20	265	160	15	165	130	200	12	M10	45	19	6×21.8	65	32	10×4.5	23
	1.5	1/20																	57	24	8×27.3				
100	1.5		150	135	155	100	100	150	155	22	310	195	15	165	130	200	15	M10	60	24	8×27.3	75	38	10×4.5	38
	2.2	1/30												215	180	250		M12	70	28	8×31.3				
120	2.2		165	160	185	120	120	180	180	28	360	230	18	215	180	250	18	M12	70	28	8×31.3	85	45	12×4.5	60
	3.0	1/50																							
135	3.0		185	170	210	135	130	200	200	30	390	250	18	215	180	250	20	M12	68	28	8×31.3	95	55	15×5	80
	4.0	1/60																							

WPDZK 型

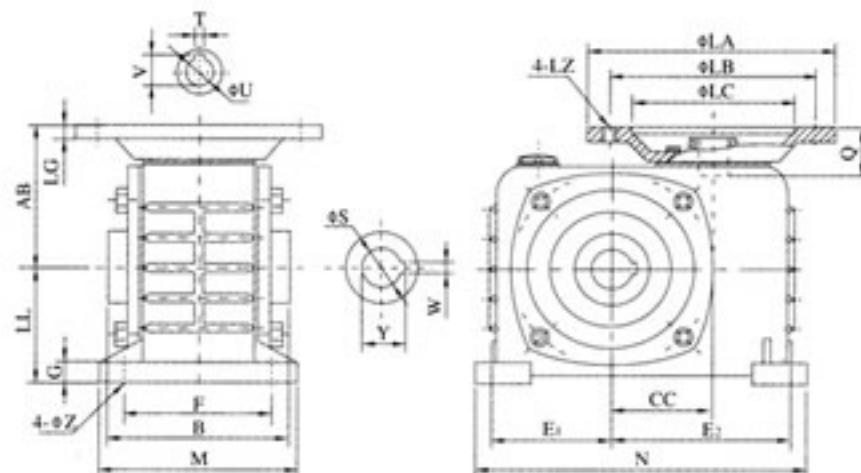

型号 size	入功率 input (kw)	减速比 ratio	AB	B	CC	E ₁	E ₂	F	G	LL	N	M	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft		重量 weight(kg)
														LB	LC	LA	LG	LZ	Q	U	T×V	S	W×Y	
50	0.18	1/5	88	107	50	53	77	100	15	76	160	125	11	115	95	140	10	M8	26	11	4×12.8	20	6×22.8	8
60	0.18		80	117	60	68	92	100	15	82	190	130	11	115	95	140	10	M8	27	11	4×12.8	25	8×28.3	12.5
	0.37	1/10												130	110	160			37	14	5×16.3			
70	0.37		100	131	70	75	115	120	20	95	230	155	15	130	110	160	10	M8	32	14	5×16.3	30	8×33.3	16
	0.75	1/15												165	130	200		M10	42	19	6×21.8			
80	0.75		120	144	80	96	144	125	20	100	265	160	15	165	130	200	12	M10	45	19	6×21.8	35	10×38.3	23
	1.5	1/20																	57	24	8×27.3			
100	1.5		150	175	100	100	150	155	22	135	310	195	15	165	130	200	15	M10	60	24	8×27.3	40	12×43.3	38
	2.2	1/30												215	180	200		M12	70	28	8×31.3			
120	2.2		165	200	120	120	180	180	28	160	360	230	18	215	180	250	18	M12	70	28	8×31.3	45	14×48.8	60
	3.0	1/50																						
135	3.0		185	212	135	130	200	200	30	170	390	250	18	215	180	250	20	M12	68	28	8×31.3	60	18×64.4	80
	4.0	1/60																						





WP 系列蜗轮蜗杆减速机

WPWE 型



轴指向表示 SHAFT DIRECTION

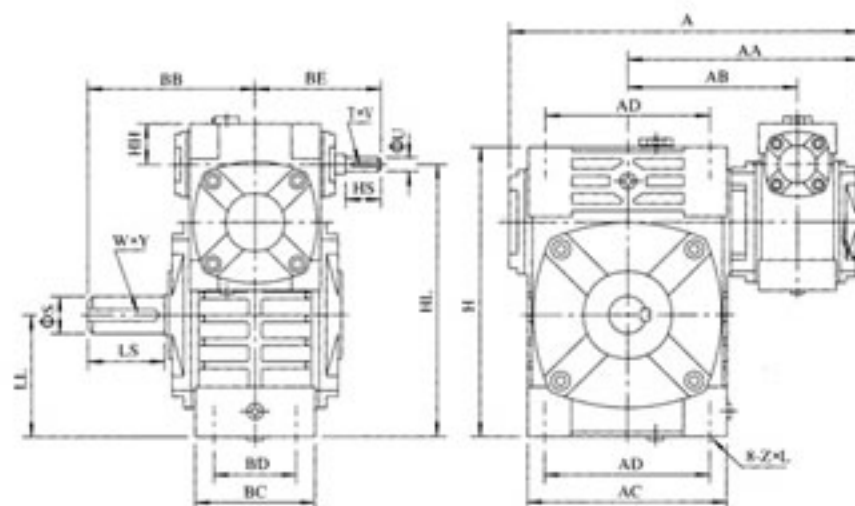



型号 size	减速比 ratio	A	AA	AB	BB	BE	AC	BC	AD	BD	HH	HL	LL	H	ZxL	入力轴 input shaft			出力轴 output shaft			重量 weight (kg)
																HS	U	TxV	LS	S	WxY	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	131	89	152	86	125	65	35	200	90	215	M10x25	25	12	4x2.5	60	28	8x4	19
50-80		297	197	144	142	107	169	102	140	70	35	235	105	250	M12x28	30	12	4x2.5	65	32	10x5	28
60-100		363	231	175	169	122	216	117	180	90	42	290	130	310	M12x30	40	15	5x3	75	38	10x5	43
70-120		408	256	193	190	140	256	124	220	100	55	345	155	370	M14x32	40	18	6x3.5	85	45	14x5.5	64
80-135		471	298	226	210	160	296	147	260	110	65	400	185	425	M16x35	50	22	6x3.5	95	55	16x6	99
100-155		555	354	269	252	190	345	185	280	120	80	458	203	461	M16x35	50	25	8x4	110	60	18x7	136
120-175		598	379	287	262	229	374	192	320	140	95	518	223	521	M16x35	65	30	8x4	110	65	18x7	193
135-200		662	425	318	305	260	412	230	360	150	105	580	245	575	M20x36	75	35	10x5	125	70	20x7.5	280
155-250		795	510	380	360	302	500	285	420	190	103	705	300	700	M24x42	85	40	12x5	155	90	25x9	442

WPEA 型



轴指向表示 SHAFT DIRECTION

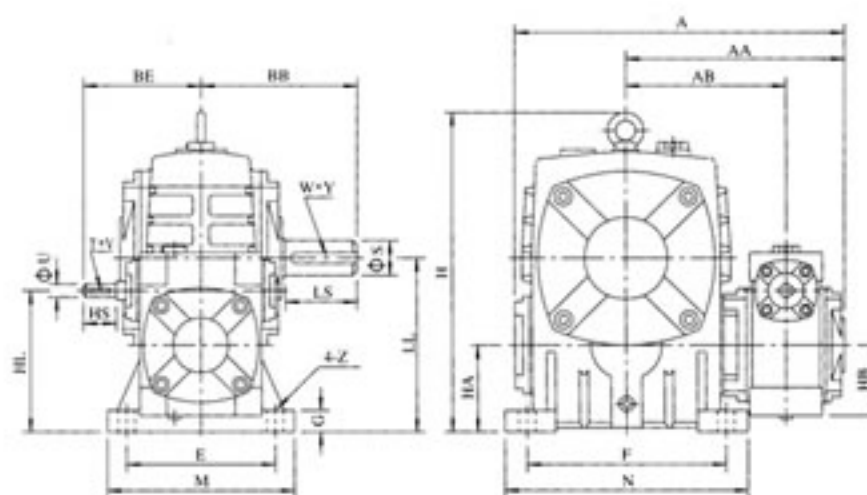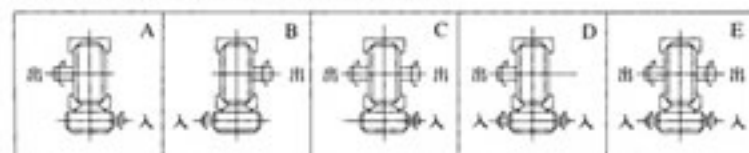

型号 size	减速比 ratio	A	AA	AB	BB	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	入力轴 input shaft			出力轴 output shaft			重量 weight(kg)
																		HS	U	T×V	LS	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	131	89	100	140	236	70	50	150	190	115	150	20	15	25	12	4×2.5	60	28	8×4	20
50-80		297	197	144	142	107	130	160	268	80	65	170	220	135	180	20	15	30	12	4×2.5	65	32	10×5	28
60-100		363	231	175	169	122	160	200	336	100	75	190	270	155	220	25	15	40	15	5×3	75	38	10×5	44
70-120		408	256	193	190	140	190	240	430	120	90	230	320	180	260	30	18	40	18	6×3.5	85	45	14×5.5	73
80-135		471	298	226	210	160	215	270	480	135	105	250	350	200	290	30	18	50	22	6×3.5	95	55	16×6	101
100-155		555	354	269	252	190	235	290	531	135	130	275	390	220	320	35	21	50	25	8×4	110	60	18×7	144
120-175		598	379	287	262	229	280	335	600	160	155	310	430	250	350	40	21	65	30	8×4	110	65	18×7	201
135-200		662	425	318	305	260	310	375	666	175	185	360	480	290	390	40	24	75	35	10×5	125	70	20×7.5	293
155-250	795	510	380	360	302	355	450	800	200	203	460	560	380	480	45	28	85	40	12×5	155	90	25×9	462	



WP 系列蜗轮蜗杆减速机



WPES 型



轴指向表示 SHAFT DIRECTION

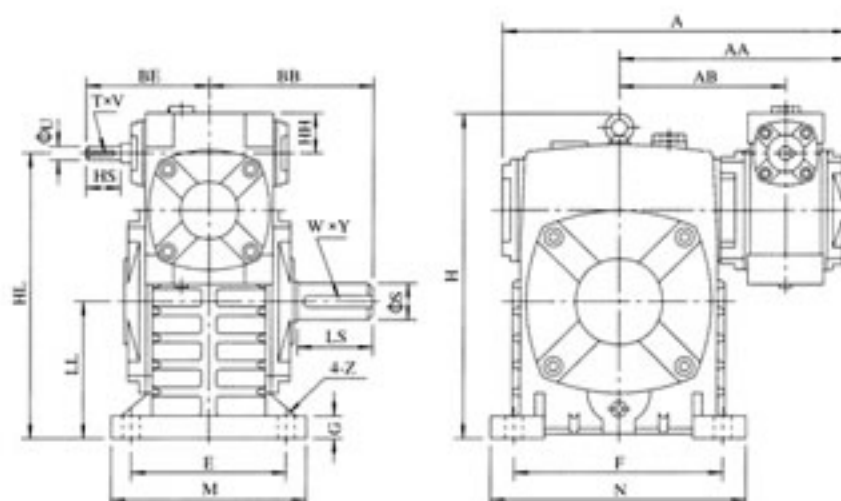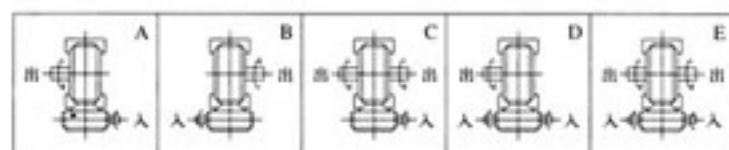


型号 size	减速比 ratio	A	AA	AB	BB	BE	HH	HL	LL	H	M	N	E	F	G	Z	入力轴 input shaft			出力轴 output shaft			重量 weight (kg)
																	HS	U	T×V	LS	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	131	89	35	215	105	238	150	190	115	150	20	15	25	12	4×2.5	60	28	8×4	20
50-80		297	197	144	142	107	35	250	120	273	170	220	135	180	20	15	30	12	4×2.5	65	32	10×5	27
60-100		363	231	175	169	122	42	310	150	334	190	270	155	220	25	15	40	15	5×3	75	38	10×5	44
70-120		408	256	193	190	140	55	370	180	423	230	320	180	260	30	18	40	18	6×3.5	85	45	14×5.5	73
80-135		471	298	226	210	160	65	430	215	482	250	350	200	290	30	18	50	22	6×3.5	95	55	16×6	101
100-155		555	354	269	252	190	80	490	235	541	275	390	220	320	35	21	50	25	8×4	110	60	18×7	144
120-175		598	379	287	262	229	95	555	260	600	310	430	250	350	40	21	65	30	8×4	110	65	18×7	201
135-200		662	425	318	305	260	105	625	290	677	360	480	290	390	40	24	75	35	10×5	125	70	20×7.5	293
155-250		795	510	380	360	302	103	755	350	824	460	560	380	480	45	28	85	40	12×5	155	90	25×9	462

WPEX 型





WPEX 轴指向表示
SHAFT DIRECTION

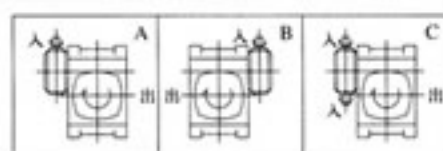

WPEO 型



WPEO 轴指向表示
SHAFT DIRECTION

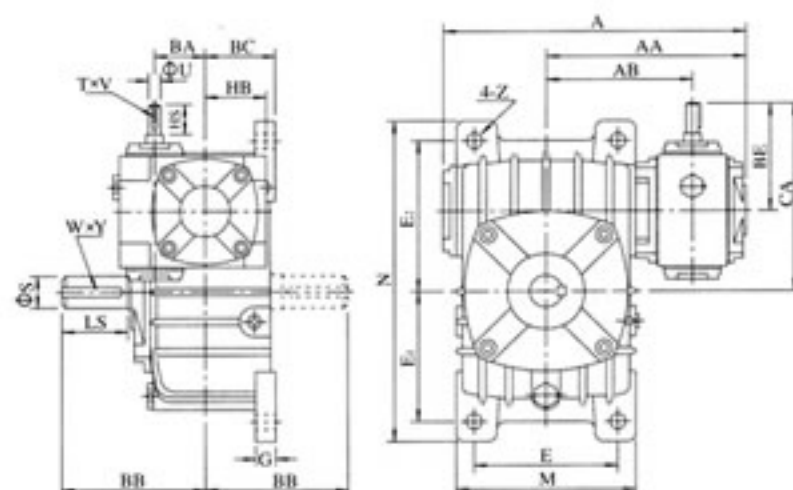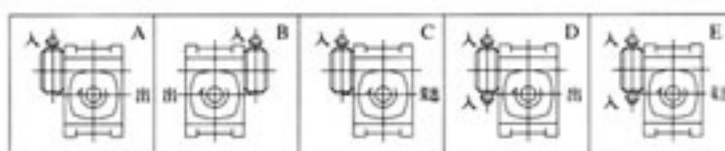

型号 size	减速比 ratio	A	AA	AB	BA	BB	BC	BE	HB	CA	M	N	E	E ₁	E ₂	G	Z	入力轴 input shaft			出力轴 output shaft			重量 weight (kg)
																		HS	U	T×V	LS	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	40	131	65	89	50	159	156	295	120	120	135	20	15	25	12	4×2.5	60	28	8×4	19
50-80		297	197	144	50	142	70	107	65	187	175	320	140	130	150	20	15	30	12	4×2.5	65	32	10×5	27
60-100		363	231	175	60	169	90	122	75	222	224	375	190	155	180	26	15	40	15	5×3	75	38	10×5	44
70-120		408	256	193	70	190	100	140	90	260	266	450	220	185	215	30	18	40	18	6×3.5	85	45	14×5.5	63
80-135		471	298	226	80	210	110	160	105	295	306	495	260	210	235	30	18	50	22	6×3.5	95	55	16×6	96
100-155		555	354	269	100	252	140	190	130	345	350	590	290	245	295	35	21	50	25	8×4	110	60	18×7	149
120-175		598	379	287	120	262	150	229	155	404	394	640	320	267	323	40	21	65	30	8×4	110	65	18×7	191
135-200		662	425	318	135	305	175	260	185	460	440	710	370	290	360	40	24	75	35	10×5	125	70	20×7.5	278
155-250		795	510	380	155	360	200	302	203	552	510	860	440	350	440	45	28	85	40	12×5	155	90	25×9	442





WP 系列蜗轮蜗杆减速机

WPED 型



轴指向表示 SHAFT DIRECTION

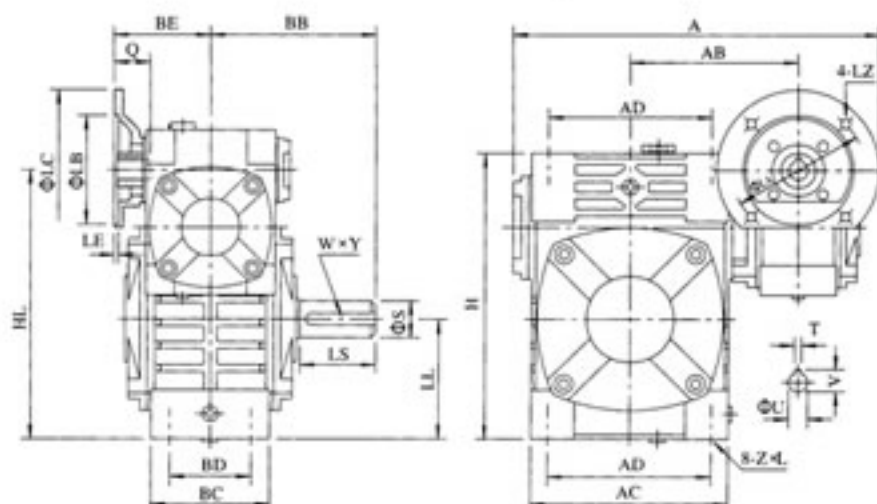



型号 size	入功率 input (kw)	减速比 ratio	A	AB	BB	BE	AC	BC	AD	BD	HL	LL	H	Z×L	电机法兰 flange					入力孔 input hole			出力轴 output shaft			重量 weight (kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40-70	0.12	1/200	287	126	131	75	152	86	125	65	200	90	215	M10×25	115	95	140	4	M8	31	11	4×12.8	60	28	8×4	19
50-80	0.18		314	144	142	83	169	102	140	70	235	105	250	M12×28	115	95	140	4	M8	31	11	4×12.8	65	32	10×5	28
60-100	0.37		387	175	169	91	216	117	180	90	290	130	310	M12×30	130	110	160	4	M8	33	14	5×16.3	75	38	10×5	44
70-120	0.37 0.75		425 445	193	190	109 111	256	124	220	100	345	155	370	M14×32	130 165	130	160	4	M8 M10	40 42	14 19	5×16.3 6×21.8	85	45	14×5.5	66
80-135	0.75 1.5	1/400 1/500	499	226	210	125	296	147	260	110	400	185	425	M16×35	165	130	200	4.5	M10	48 52	19 24	6×21.8 8×27.3	95	55	16×6	101
100-155	1.5	1/600	570	269	252	148	345	185	280	120	458	203	461	M16×35	165	130	200	4.5	M10	52	24	8×27.3	110	60	18×7	139
120-175	2.2 3.0	1/800 1/900	631	287	262	181	374	192	320	140	518	223	521	M16×35	215	180	250	5	M12	63	28	8×31.3	110	65	18×7	196
135-200	3.0 4.0		680	318	305	202	412	230	360	150	580	245	575	M20×36	215	180	250	5	M12	63	28	8×31.3	125	70	20×7.5	285
155-250	5.5		815	380	360	360	500	285	420	190	705	300	700	M24×42	265	230	300	5	M12	83	38	10×41.3	155	90	25×9	450

WPEDA 型



轴指向表示 SHAFT DIRECTION

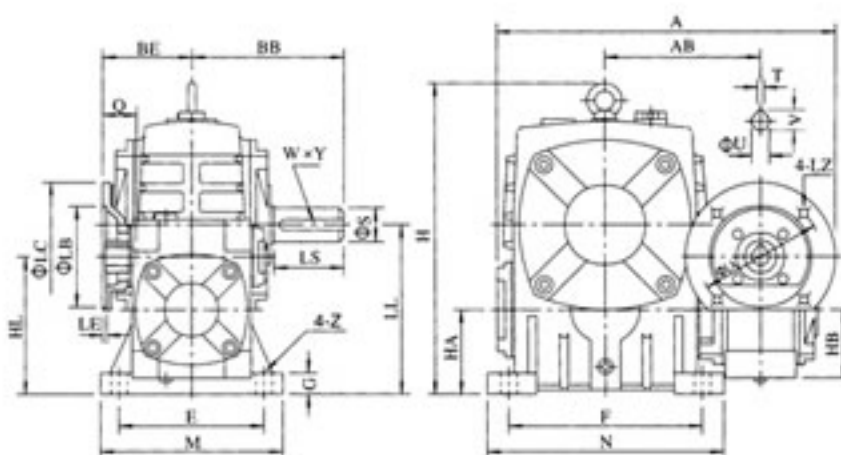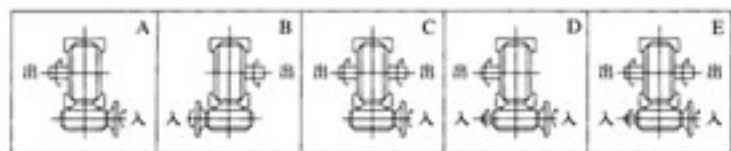

型号 size	入功率 input (kw)	减速比 ratio	A	AB	BB	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft			重量 weight (kg)
																		LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40-70	0.12	1/200	287	126	131	75	110	140	236	70	50	105	190	115	150	20	15	115	95	140	4	M8	31	11	4×12.8	60	28	8×4	19
50-80	0.18		314	144	142	83	130	160	268	80	65	170	220	135	180	20	15	115	95	140	4	M8	31	11	4×12.8	65	32	10×5	27
60-100	0.37		387	175	169	91	160	200	336	100	75	190	270	155	220	25	15	130	110	160	4	M8	33	14	5×16.3	75	38	10×5	45
70-120	0.37		425	193	190	109	190	240	430	120	90	230	320	180	260	30	18	130	130	160	4	M8	40	14	5×16.3	85	45	14×5.5	75
	0.75	445	111			165												130	200	M10		42	19	6×21.8					
80-135	0.75	1/400	499	226	210	125	215	270	480	135	105	250	350	200	290	30	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	103
	1.5	1/500																					52	24	8×27.3				
100-155	1.5	1/600	570	269	252	148	235	290	531	135	130	275	390	220	320	35	21	165	130	200	4.5	M10	52	24	8×27.3	110	60	18×7	147
120-175	2.2	1/800 1/900	631	287	262	181	280	355	600	160	155	310	430	250	350	40	21	215	180	250	5	M12	63	28	8×31.3	110	65	18×7	204
3.0																													
135-200	3.0																												
4.0																													
155-250	5.5		815	380	360	360	355	450	800	200	203	460	560	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	155	90	25×9	470



WP 系列蜗轮蜗杆减速机



WPEDS 型



轴指向表示 SHAFT DIRECTION

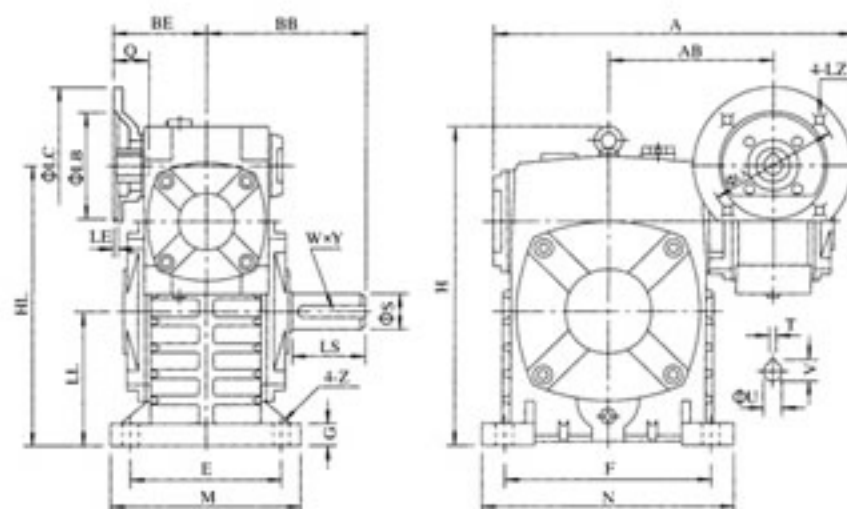


型号 size	入功率 input (kw)	减速比 ratio	A	AB	BB	BE	HL	LL	H	M	N	E	F	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft			重量 weight (kg)
																LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40-70	0.12	1/200	287	126	131	75	215	105	238	150	190	115	150	20	15	115	95	140	4	M8	31	11	4×12.8	60	28	8×4	19
50-80	0.18		314	144	142	83	250	120	273	170	220	135	180	20	15	115	95	140	4	M8	31	11	4×12.8	65	32	10×5	27
60-100	0.37	1/300	387	175	169	91	310	150	334	190	270	155	220	25	15	130	110	160	4	M8	33	14	5×16.3	75	38	10×5	45
70-120	0.37		425	193	190	109	370	180	423	230	320	180	260	30	18	130	110	160	4	M8	40	14	5×16.3	85	45	14×5.5	75
	0.75	1/400	445			111										165	130	200	4	M10	42	19	6×21.8				
80-135	0.75		499	226	210	125	430	215	482	250	350	200	290	30	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	103
	1.5	1/500																			52	24	8×27.3				
100-155	1.5		570	269	252	148	490	235	541	275	390	220	320	35	21	165	130	200	4.5	M10	52	24	8×27.3	110	60	18×7	147
120-175	2.2	1/800	631	287	262	181	555	260	600	310	430	250	350	40	21	215	180	250	5	M12	63	28	8×31.3	110	65	18×7	204
	3.0																										
135-200	3.0	1/900	680	318	305	202	625	290	677	360	480	290	390	40	24	215	180	250	5	M12	63	28	8×31.3	125	70	20×7.5	298
	4.0																										
155-250	5.5		815	380	360	247	755	350	824	460	560	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	155	90	25×9	470

WPEDX 型





WPEDX 轴指向表示 SHAFT DIRECTION



WPEDO 型



WPEDO 轴指向表示 SHAFT DIRECTION

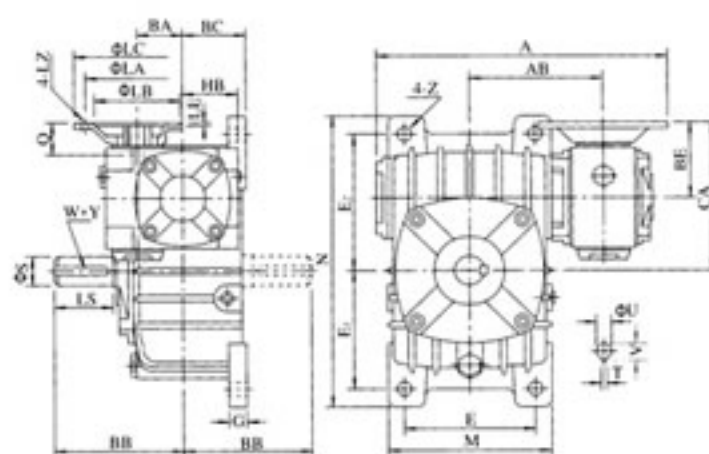

型号 size	入功率 input (kw)	减速比 ratio	A	AB	BA	BB	BC	BE	HB	CA	M	N	E	E ₁	E ₂	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft			重量 weight (kg)
																		LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40-70	0.12	1/200	287	126	40	131	65	75	50	145	156	295	120	120	135	20	15	115	95	140	4	M8	31	11	4×12.8	60	28	8×4	19
50-80	0.18		314	144	50	142	70	83	65	163	175	320	140	130	150	20	15	115	95	140	4	M8	31	11	4×12.8	65	32	10×5	27
60-100	0.37		387	175	60	169	90	91	75	191	224	375	190	155	180	25	15	130	110	160	4	M8	33	14	5×16.3	75	38	10×5	45
70-120	0.37		425	193	70	190	100	109	90	229	266	450	220	185	215	30	18	130	110	160	4	M8	40	14	5×16.3	85	45	14×5.5	65
	0.75	445	111					231		165								130	200	M10		42	19	6×21.8					
80-135	0.75	1/400	499	226	80	210	110	125	105	260	306	495	260	210	235	30	18	165	130	200	4.5	M10	48	19	6×21.8	95	55	16×6	98
	1.5																						52	24	8×27.3				
100-155	1.5	1/600	570	269	100	252	140	148	130	303	350	590	290	245	295	35	21	165	130	200	4.5	M10	52	24	8×27.3	110	60	18×7	152
120-175	2.2	1/800 1/900	631	287	120	262	150	181	155	353	394	640	320	267	323	40	21	215	180	250	5	M12	63	28	8×31.3	110	65	18×7	194
135-200	3.0		680	318	135	305	175	202	185	402	440	710	370	290	360	40	24	215	180	250	5	M12	63	28	8×31.3	125	70	20×7.5	283
	4.0		815	380	155	360	200	247	203	497	510	860	440	350	440	45	28	265	230	300	5	M12	83	38	10×41.3	155	90	25×9	450
155-250	5.5																												





WP 系列蜗轮蜗杆减速机

WPWEK 型



轴指向表示 SHAFT DIRECTION

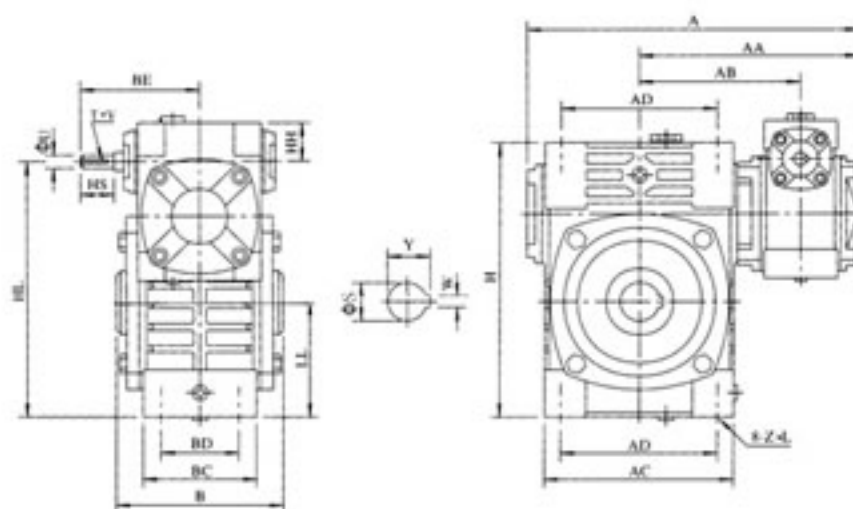



型号 size	减速比 ratio	A	AA	AB	B	BE	AC	BC	AD	BD	HH	HL	LL	H	Z×L	入力轴 input shaft			出力轴 output shaft		重量 weight (kg)
																HS	U	T×V	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	132	89	152	86	125	65	35	200	90	215	M10×25	25	12	4×2.5	30	8×33.3	17
50-80		297	197	144	150	107	169	102	140	70	35	235	105	250	M12×28	30	12	4×2.5	35	10×38.3	28
60-100		363	231	175	174	122	216	117	180	90	42	290	130	310	M12×30	40	15	5×3	40	12×43.3	43
70-120		408	256	193	180	140	256	124	220	100	55	345	155	370	M14×32	40	18	6×3.5	45	14×48.8	64
80-135		471	298	226	214	160	296	147	260	110	65	400	185	425	M16×35	50	22	6×3.5	60	18×64.4	99
100-155		555	354	269	256	190	345	185	280	120	80	458	203	461	M16×35	50	25	8×4	70	20×74.9	136
120-175		598	379	287	282	229	374	192	320	140	95	518	223	521	M16×35	65	30	8×4	80	22×85.4	193
135-200		662	425	318	324	260	412	230	360	150	105	580	245	575	M20×36	75	35	10×5	85	22×90.4	280
155-250		795	510	380	400	302	500	285	420	190	103	705	300	700	M24×42	85	40	12×5	110	28×116.4	442

WPEKA 型



轴指向表示 SHAFT DIRECTION

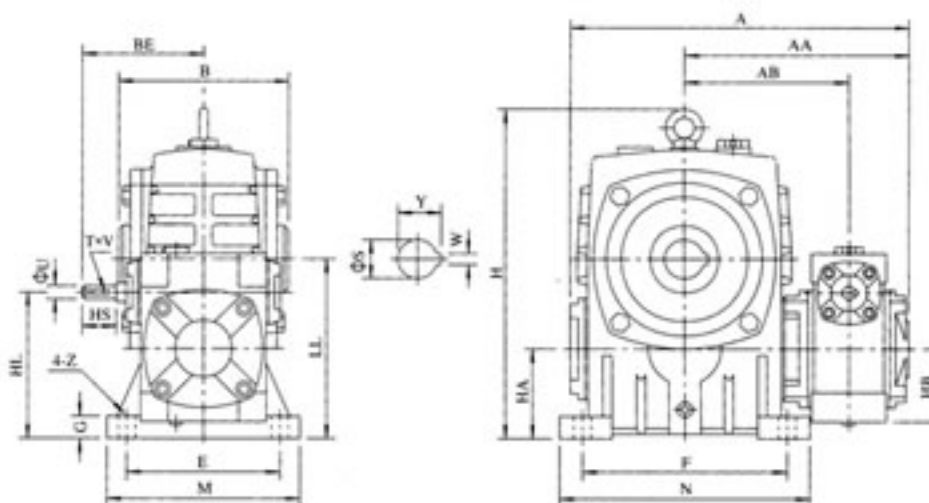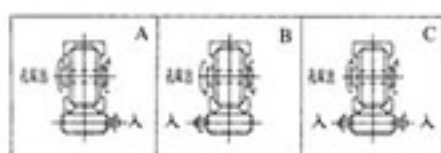

型号 size	减速比 ratio	A	AA	AB	B	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	入力轴 input shaft			出力轴 output shaft		重量 weight (kg)
																		HS	U	T×V	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	132	89	110	140	236	70	50	150	190	115	150	20	15	25	12	4×2.5	30	8×33.3	20
50-80		297	197	144	150	107	130	160	268	80	65	170	220	135	180	20	15	30	12	4×2.5	35	10×38.3	27
60-100		363	231	175	174	122	160	200	336	100	75	190	270	155	220	25	15	40	15	5×3	40	12×43.3	44
70-120		408	256	193	180	140	190	240	430	120	90	230	320	180	260	30	18	40	18	6×3.5	45	14×48.8	73
80-135		471	298	226	214	160	215	270	480	135	105	250	350	200	290	30	18	50	22	6×3.5	60	18×64.4	101
100-155		555	354	269	256	190	235	290	531	135	130	275	390	220	320	35	21	50	25	8×4	70	20×74.9	144
120-175		598	379	287	282	229	280	335	600	160	155	310	430	250	350	40	21	65	30	8×4	80	22×85.4	201
135-200		662	425	318	324	260	310	375	666	175	185	360	480	290	390	40	24	75	35	10×5	85	22×90.4	293
155-250		795	510	380	400	302	355	450	800	200	203	460	560	380	480	45	28	85	40	12×5	110	28×116.4	462



WP 系列蜗轮蜗杆减速机



WPEKS 型



轴指向表示 SHAFT DIRECTION

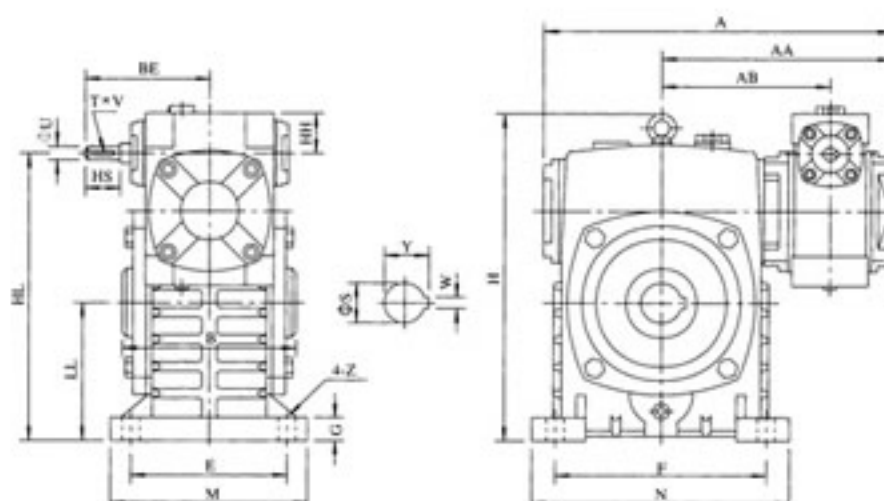



型号 size	减速比 ratio	A	AA	AB	B	BE	HH	HL	LL	H	M	N	E	F	G	Z	入力轴 input shaft			出力轴 output shaft		重量 weight (kg)
																	HS	U	T×V	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	132	89	35	215	105	238	150	190	115	150	20	15	25	12	4×2.5	30	8×33.3	20
50-80		297	197	144	150	107	35	250	120	273	170	220	135	180	20	15	30	12	4×2.5	35	10×38.3	27
60-100		363	231	175	174	122	42	310	150	334	190	270	155	220	25	15	40	15	5×3	40	12×43.3	44
70-120		408	256	193	180	140	55	370	180	423	230	320	180	260	30	18	40	18	6×3.5	45	14×48.8	73
80-135		471	298	226	214	160	65	430	215	482	250	350	200	290	30	18	50	22	6×3.5	60	18×64.4	101
100-155		555	354	269	256	190	80	490	235	541	275	390	220	320	35	21	50	25	8×4	70	20×74.9	144
120-175		598	379	287	282	229	95	555	260	600	310	430	250	350	40	21	65	30	8×4	80	22×85.4	201
135-200		662	425	318	324	260	105	625	290	677	360	480	290	390	40	24	75	35	10×5	85	22×90.4	293
155-250		795	510	380	400	302	103	755	350	824	460	560	380	480	45	28	85	40	12×5	110	28×116.4	462

WPWEKO 型



轴指向表示 SHAFT DIRECTION

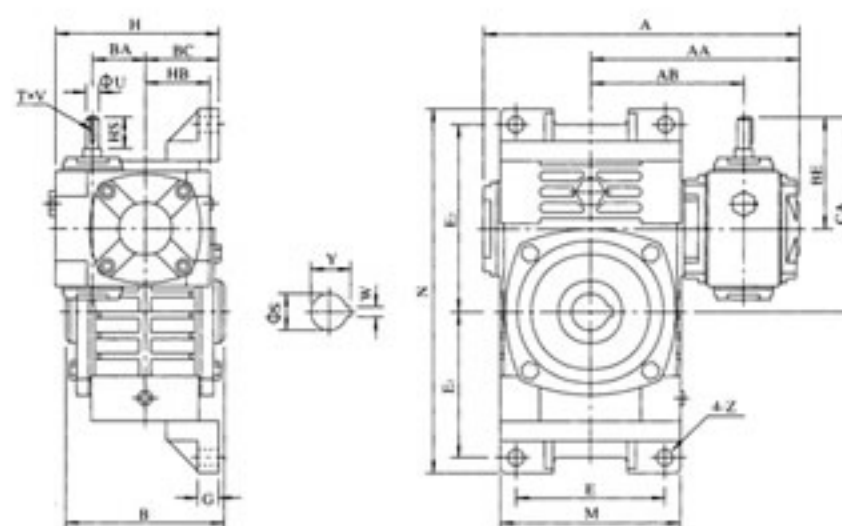

型号 size	减速比 ratio	A	AA	AB	B	BA	BC	BE	HB	CA	H	M	N	E	E ₁	E ₂	G	Z	入力轴 input shaft			出力轴 output shaft		重量 weight (kg)
																			HS	U	T×V	S	W×Y	
40-70	1/200 1/300 1/400 1/500 1/600 1/800 1/900	262	171	126	132	40	65	89	50	159	140	152	305	120	120	155	20	15	25	12	4×2.5	30	8×33.3	19.5
50-80		297	197	144	150	50	70	107	65	187	155	174	350	140	140	180	20	15	30	12	4×2.5	35	10×38.3	30.5
60-100		363	231	175	174	60	90	122	76	222	192	224	410	190	165	215	22	15	40	15	5×3	40	12×43.3	47
70-120		408	256	193	180	70	100	140	90	260	225	264	494	220	195	255	25	18	40	18	6×3.5	45	14×48.8	69
80-135		471	298	226	214	80	110	160	105	295	255	304	559	260	230	285	30	18	50	22	6×3.5	60	18×64.4	105
100-155		555	354	269	256	100	140	190	130	345	320	345	605	290	250	305	35	21	50	25	8×4	70	20×74.9	163
120-175		598	379	287	282	120	150	229	155	404	365	374	675	320	273	348	40	21	65	30	8×4	80	22×85.4	208
135-200		662	425	318	324	135	175	260	185	460	415	424	749	370	305	390	40	24	75	35	10×5	85	22×90.4	302
155-250		795	510	380	400	155	200	302	203	552	458	510	920	440	375	475	45	28	85	40	12×5	110	28×116.4	476





WP 系列蜗轮蜗杆减速机

WPWEDK 型



轴指向表示 SHAFT DIRECTION

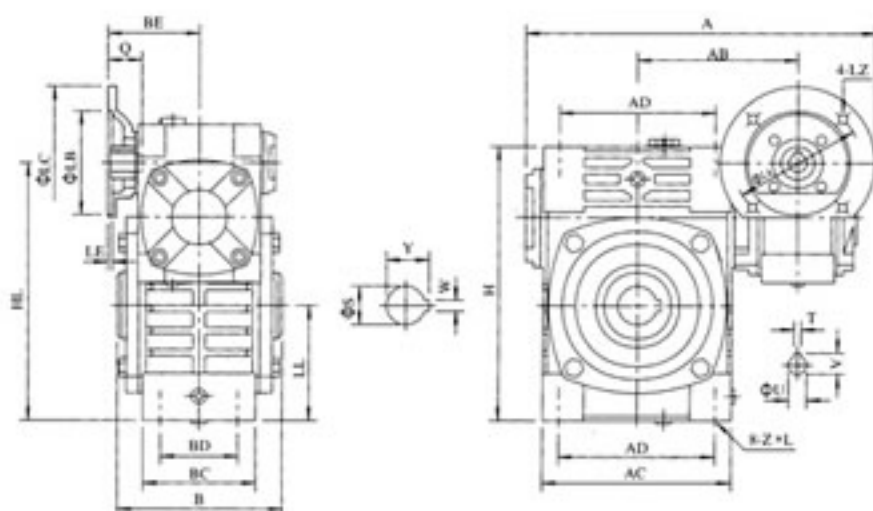



型号 size	入功率 input (kw)	减速比 ratio	A	AB	BB	BE	AC	BC	AD	BD	HL	LL	H	Z×L	电机法兰 flange					入力孔 input hole			出力轴 output shaft		重量 weight (kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40-70	0.12	1/200 1/300 1/400 1/500 1/600 1/800 1/900	287	126	132	75	152	86	125	65	200	90	215	M10×25	115	95	140	4	M8	31	11	4×12.8	30	8×33.3	18
50-80	0.18		314	144	150	83	169	102	140	70	235	105	250	M12×28	115	95	140	4	M8	31	11	4×12.8	35	10×38.3	28
60-100	0.37		387	175	174	91	216	117	180	90	290	130	310	M12×30	130	110	160	4	M8	33	14	5×16.3	40	12×43.3	44
70-120	0.37		425	193	180	109	256	124	220	100	345	155	370	M14×32	130	130	160	4	M8	40	14	5×16.3	45	14×48.8	66
	0.75		445			111								M10	165	130	200		M10	42	19	6×21.8			
80-135	0.75		499	226	214	125	296	147	260	110	400	185	425	M16×35	165	130	200	4.5	M10	48	19	6×21.8	60	18×64.4	101
	1.5													M10						52	24	8×27.3			
100-155	1.5		570	269	256	148	345	185	280	120	458	203	461	M16×35	165	130	200	4.5	M10	52	24	8×27.3	70	20×74.9	139
120-175	2.2		631	287	282	181	374	192	320	140	518	223	521	M16×35	215	180	250	5	M12	63	28	8×31.3	80	22×85.4	196
	3.0													M12											
135-200	3.0		680	318	324	202	412	230	360	150	580	245	575	M20×36	215	180	250	5	M12	63	28	8×31.3	125	22×90.4	285
155-250	5.5		815	380	400	360	500	285	420	190	705	300	700	M24×42	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	450

WPEDKA 型



轴指向表示 SHAFT DIRECTION

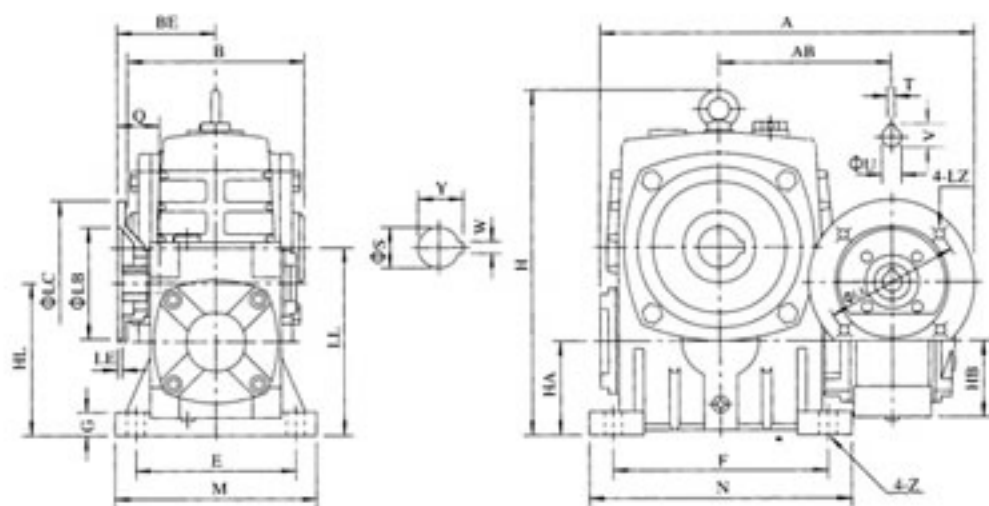

型号 size	入功率 input (kw)	减速比 ratio	A	AB	B	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft		重量 weight (kg)
																		LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40-70	0.12	1/200 1/300 1/400 1/500 1/600 1/800 1/900	287	126	132	75	110	140	236	70	50	150	190	115	150	20	15	115	95	140	4	M8	31	11	4×12.8	30	8×33.3	19
50-80	0.18		314	144	150	83	130	160	268	80	65	170	220	135	180	20	15	115	95	140	4	M8	31	11	4×12.8	35	10×38.3	27
60-100	0.37		387	175	174	91	160	200	336	100	75	190	270	155	220	25	15	130	110	160	4	M8	33	14	5×16.3	40	12×43.3	45
70-120	0.37		425	193	180	109	190	240	430	120	90	230	320	180	260	30	18	130	130	160	4	M8	40	14	5×16.3	45	14×48.8	75
	0.75		445			111												165	130	200		M10	42	19	6×21.8			
80-135	0.75		499	226	214	125	215	270	480	135	105	250	350	200	290	30	18	165	130	200	4.5	M10	48	19	6×21.8	60	18×64.4	103
	1.5																						52	24	8×27.3			
100-155	1.5		570	269	256	148	235	290	531	135	130	275	390	220	320	35	21	165	130	200	4.5	M10	52	24	8×27.3	70	20×74.9	147
120-175	2.2		631	287	282	181	280	335	600	160	155	310	430	250	350	40	21	215	180	250	5	M12	63	28	8×31.3	80	22×85.4	204
	3.0																											
135-200	3.0		680	318	324	202	310	375	666	175	185	360	480	290	390	40	24	215	180	250	5	M12	63	28	8×31.3	125	22×90.4	298
155-250	5.5		815	380	400	360	355	450	800	200	203	460	560	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	470



WP 系列蜗轮蜗杆减速机



WPEDKS 型



轴指向表示 SHAFT DIRECTION

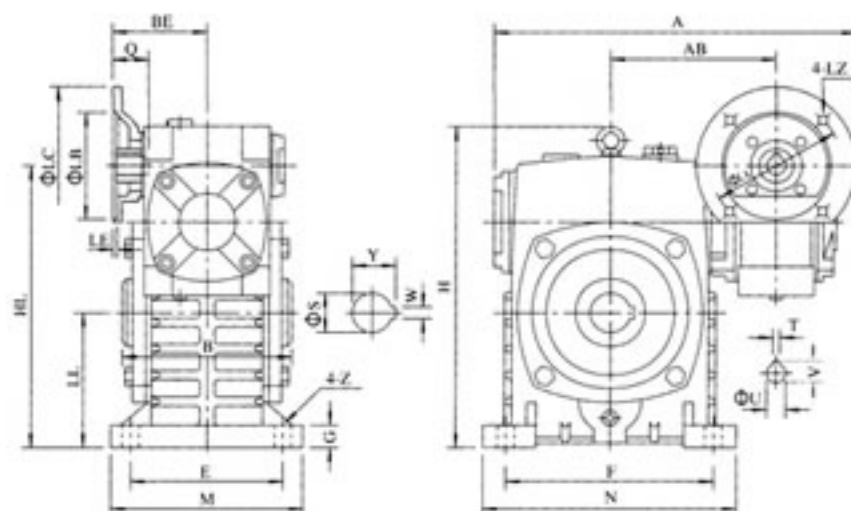



型号 size	入功率 input (kw)	减速比 ratio	A	AB	B	BE	HL	LL	H	M	N	E	F	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft		重量 weight (kg)
																LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40-70	0.12	1/200	287	126	132	75	215	105	238	150	190	115	150	20	15	115	95	140	4	M8	31	11	4×12.8	30	8×33.3	19
50-80	0.18		314	144	150	83	250	120	273	170	220	235	180	20	15	115	95	140	4	M8	31	11	4×12.8	35	10×38.3	27
60-100	0.37	1/300	387	175	174	91	310	150	334	190	270	155	220	25	15	130	110	160	4	M8	33	14	5×16.3	40	12×43.3	45
70-120	0.37		425	193	180	109	370	180	423	230	320	180	260	30	18	130	130	160	4	M8	40	14	5×16.3	45	14×48.8	675
80-135	0.75	1/400	445	193	180	111	370	180	423	230	320	180	260	30	18	165	130	200	4	M10	42	19	6×21.8	60	18×64.4	103
	1.5		499	226	214	125	430	215	482	250	350	200	290	30	18	165	130	200	4.5	M10	48	19	6×21.8	60	18×64.4	103
100-155	1.5	1/500	570	269	256	148	490	235	541	275	390	220	320	35	21	165	130	200	4.5	M10	52	24	8×27.3	70	20×74.9	147
120-175	2.2		631	287	282	181	555	260	600	310	430	250	350	40	21	215	180	250	5	M12	63	28	8×31.3	80	22×85.4	204
	3.0	1/800	680	318	324	202	625	290	677	360	460	290	390	40	24	215	180	250	5	M12	63	28	8×31.3	85	22×90.4	298
135-200	4.0	1/900	815	380	400	247	755	350	824	460	510	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	470
155-250	5.5		815	380	400	247	755	350	824	460	510	380	480	45	28	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	470

WPWEDKO 型



轴指向表示 SHAFT DIRECTION

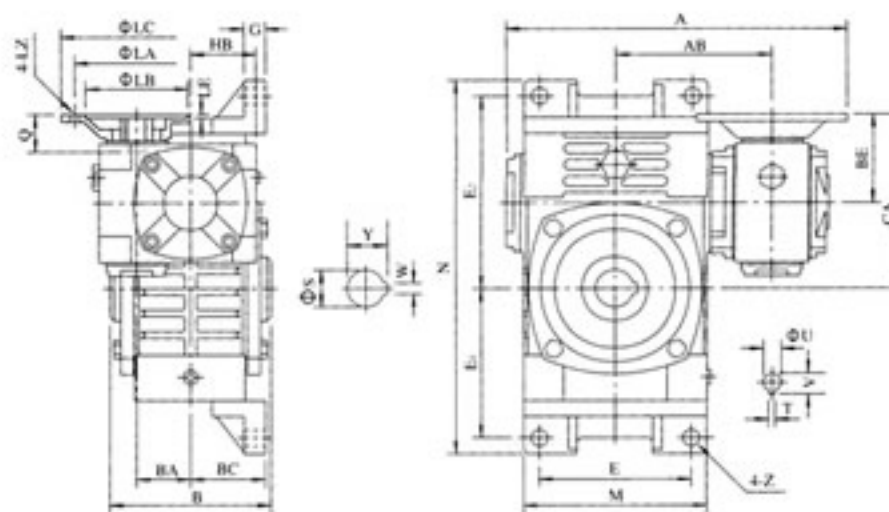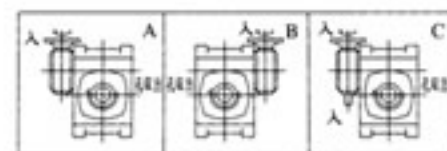


型号 size	入功率 input (kw)	减速比 ratio	A	AB	B	BA	BC	BE	HB	CA	M	N	E	E ₁	E ₂	G	Z	电机法兰 flange					入力孔 input hole			出力轴 output shaft		重量 weight (kg)
																		LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40-70	0.12	1/200	287	126	132	40	65	75	50	145	152	305	120	120	155	20	15	115	95	140	4	M8	31	11	4×12.8	30	8×33.3	20
50-80	0.18		314	144	150	50	70	83	65	163	174	350	140	140	180	20	15	115	95	140	4	M8	31	11	4×12.8	35	10×38.3	31
60-100	0.37	1/300	387	175	174	60	90	91	75	191	224	410	190	165	215	25	15	130	110	160	4	M8	33	14	5×16.3	40	12×43.3	48
70-120	0.37		425	193	180	70	100	109	90	229	264	494	220	195	255	30	18	130	110	160	4	M8	40	14	5×16.3	45	14×48.8	71
80-135	0.75	1/400	445	193	180	70	100	111	90	231	264	494	220	195	255	30	18	165	130	200	4	M10	42	19	6×21.8	60	18×64.4	107
	1.5		499	226	214	80	110	125	105	260	304	559	260	230	285	30	18	165	130	200	4.5	M10	48	19	6×21.8	60	18×64.4	107
100-155	1.5	1/500	570	269	256	100	140	148	130	303	345	605	290	250	305	35	21	165	130	200	4.5	M10	52	24	8×27.3	70	20×74.9	166
120-175	2.2		631	287	282	120	150	181	155	356	374	675	320	273	348	40	21	215	180	250	5	M12	63	28	8×31.3	80	22×85.4	211
	3.0	1/800	680	318	324	135	175	202	185	402	424	749	370	305	390	40	24	215	180	250	5	M12	63	28	8×31.3	85	22×90.4	307
135-200	4.0	1/900	815	380	400	155	200	247	203	497	510	920	440	375	475	45	28	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	484
155-250	5.5		815	380	400	155	200	247	203	497	510	920	440	375	475	45	28	265	230	300	5	M12	83	38	10×41.3	110	28×116.4	484




WP 系列蜗轮蜗杆减速机

WD 型

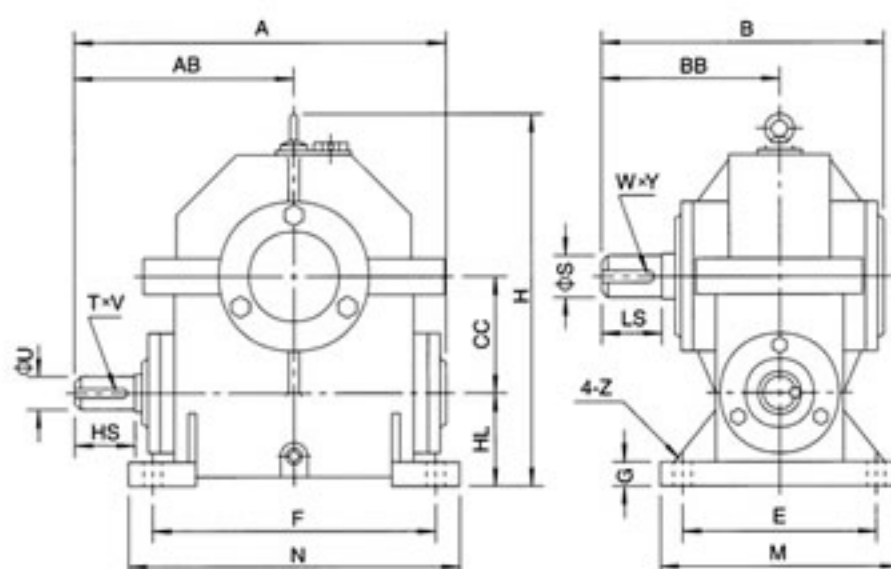

轴指向表示 SHAFT DIRECTION



型号	模数	齿数	A	AB	B	BB	CC	E	F	H	HL	M	N	G	Z	输入轴			输出轴			重量 (kg)
																HS	U	T×V	LS	S	W×Y	
33	1.5	30	137	86	124	79	33	75	95	120	40	90	110	10	7	30	14	5×3	30	16	5×3	4
43	1.5	40	170	103	134	85	43	80	100	141	42	100	120	11	9	30	14	5×3	30	16	5×3	5
48	1.5	50	177	106	135	85	48	75	115	151	40	95	135	12	7	30	14	5×3	30	16	5×3	7
55.5	1.5	60	197	116	145	90	55.5	80	130	171	40	100	150	13	7	30	14	5×3	30	16	5×3	14
33	2	20	137	86	124	79	33	75	95	120	40	90	110	10	7	30	14	5×3	30	16	5×3	4
43	2	30	170	103	134	85	43	80	100	141	42	100	120	11	9	30	15	5×3	30	18	6×3.5	5
53	2	40	175	105	140	88	53	90	116	162	42	110	140	12	9	30	15	5×3	30	18	6×3.5	7
63	2	50	194	118	155	99	63	102	135	183	45	120	160	13	9	30	16	5×3	35	18	6×3.5	10
73	2	60	225	132	184	115	73	124	174	211	52	150	200	15	12	30	16	5×3	35	22	6×3.5	15
43	2.5	20	170	103	134	85	43	80	100	141	42	100	120	11	9	30	15	5×3	30	18	6×3.5	5
53	2.5	30	175	105	140	88	53	90	116	162	42	110	140	12	9	30	15	5×3	30	18	6×3.5	7
63	2.5		230	139	181	114	63	114	160	197	55	140	190	14	12	40	22	6×3.5	40	24	8×4	14
78	2.5		247	146	189	119	78	130	188	232	62	160	220	16	12	40	22	6×3.5	40	28	8×4	18
90	2.5		288	176	215	138	90	130	210	294	70	170	246	17	14	50	24	8×4	50	28	8×4	24
48	3		192	116	163	102	48	90	120	161	47	120	150	13	11	35	18	6×3.5	35	22	6×3.5	7
63	3		230	139	181	114	63	114	160	197	55	140	190	14	12	40	22	6×3.5	40	24	8×4	14
78	3		247	146	189	119	78	130	188	232	62	160	220	16	12	40	22	6×3.5	40	28	8×4	18
93	3		301	185	224	144	93	154	206	280	77	180	240	17	14	50	24	8×4	50	28	8×4	24
108	3		327	196	238	154	108	135	238	350	80	164	268	17	14	50	28	8×4	60	34	10×5	30
63	4		230	139	181	114	63	114	160	195	55	140	190	14	12	40	22	6×3.5	40	24	8×4	14
82	4		263	162	221	140	82	154	184	268	88	180	220	17	14	50	24	8×4	50	28	8×4	24
102	4		310	187	246	160	102	144	234	342	80	180	270	18	14	50	28	8×4	60	34	10×5	30
122	4		373	224	296	190	122	188	274	390	95	220	310	22	16	60	30	8×4	70	38	12×5	48
80	5		268	171	253	168	80	134	184	252	80	170	215	16	14	60	30	8×4	70	34	10×5	25
105	5		326	203	270	178	105	144	234	341	80	180	270	18	14	65	30	8×4	70	38	12×5	36
130	5		366	222	275	181	130	184	284	392	80	220	320	21	16	65	30	8×4	75	42	12×5	48
153	5		439	267	293	194	153	190	350	464	112	230	390	25	18	80	36	10×5	80	40	12×5	70
122	6		383	234	296	190	122	188	274	390	95	220	310	22	16	70	36	10×5	70	38	12×5	50
153	6		439	267	293	194	153	190	350	464	112	230	390	25	18	80	36	10×5	80	40	12×5	70
180	6		519	310	327	213	180	210	390	537	112	250	430	26	18	80	36	10×5	85	42	12×5	82



WP. WPK. WPW. WPWK(A.S.X.O.T.V)型 入力轴功率及出力轴力矩表

Input and Output

入力轴转速 speed of input shaft:1500r/min

功率及力矩 power and moment 高速比 ratio 型号 size	入力轴功率 input(kW)								出力轴力矩 Output(Nm)							
	1/10	1/15	1/20	1/25	1/30	1/40	1/50	1/60	1/10	1/15	1/20	1/25	1/30	1/40	1/50	1/60
40	0.40	0.33	0.26	0.24	0.22	0.16	0.14	0.12	19	23	20	25	25	24	26	26
50	0.65	0.52	0.40	0.37	0.34	0.27	0.24	0.20	31	36	35	38	39	40	43	43
60	1.00	0.82	0.65	0.59	0.54	0.45	0.40	0.32	50	58	56	68	62	71	75	70
70	1.60	1.35	1.10	0.96	0.82	0.67	0.61	0.52	83	98	101	112	99	104	113	113
80	2.20	1.78	1.36	1.28	1.20	0.90	0.80	0.75	113	133	120	149	151	140	145	163
100	3.60	3.10	2.60	2.35	2.10	1.68	1.30	1.00	193	237	258	284	277	291	257	229
120	5.20	4.35	3.50	3.25	3.00	2.20	1.90	.50	262	336	361	404	413	392	399	355
135	9.75	7.85	6.00	5.50	5.00	3.69	2.89	2.30	540	622	619	696	707	607	626	562
155	12.80	9.90	7.00	6.53	6.00	4.40	3.61	3.00	709	785	722	842	848	784	770	791
175	17.30	13.60	10.00	9.13	8.30	6.18	4.85	4.07	958	1091	1044	1221	1189	1133	1127	1078
200	22.60	18.20	13.86	12.75	11.67	8.78	6.71	5.58	1280	1477	1482	1643	1782	1654	1516	1449
250	33.20	27.40	21.60	20.00	18.43	14.00	10.43	8.62	1881	2266	2310	2579	2745	2674	2357	2371

WPD. WPKD. WPWD. WPWKD(A.S.X.O.T.V)型 入力轴功率及出力轴力矩表

Input and Output

入力轴转速 speed of input shaft:1500r/min(配用AO2或Y系列电机 Matching electric motor series AO2 or Y)

功率及力矩 power and moment 高速比 ratio 型号 size	入力轴功率 input(kW)								出力轴力矩 Output(Nm)							
	1/10	1/15	1/20	1/25	1/30	1/40	1/50	1/60	1/10	1/15	1/20	1/25	1/30	1/40	1/50	1/60
40	0.12								6	8	9	13	14	15	19	20
50	0.18								9	12	16	19	20	24	31	35
60	0.37								19	26	34	42	42	58	67	73
70	0.75				0.37				39	54	70	87	95	58	68	70
80	1.5				0.75				77	112	142	174	189	137	150	154
100	1.5								80	115	149	181	198	260	307	344
120	3				2.2				151	232	310	372	413	392	480	521
135	4				3				219	321	413	509	565	542	649	690
155	5.5								270	411	525	709	760	904	1100	1260
175	7.5				5.5				415	602	783	1002	1074	1008	1278	1450
200	11								623	892	1176	1417	1680	2072	2485	2856
250	15				11				850	1246	1604	1933	2234	2101	2486	3025



WPE. WPEK. WPWE. WPWEK (A.S.X.O)型
WPED. WPEDK. WPWED.WPWEDK

入力轴功率及出力轴力矩表

Input and Output

入力轴转速 speed of input shaft:1500r/min

型号 size	功率及力矩 power and moment	WPE.WPEK.WPWE.WPWEK							WPED.WPEDK.WPWED.WPWEDK						
		减 速 比 ratio							减 速 比 ratio						
		1-200	1-300	1-400	1-500	1-600	1-800	1-900	1-200	1-300	1-400	1-500	1-600	1-800	1-900
40-70	入力轴功率 (kw)	0.48	0.34	0.28	0.25	0.23	0.20	0.17	0.12	0.12	0.12	0.12	0.12	0.12	0.12
	出力轴力矩 (Nm)	250	250	250	250	250	250	250	63	88	107	120	130	150	177
50-80	入力轴功率 (kw)	0.65	0.51	0.42	0.38	0.31	0.29	0.25	0.18	0.18	0.18	0.18	0.18	0.18	0.18
	出力轴力矩 (Nm)	350	350	350	350	350	350	350	97	124	150	166	203	217	252
60-100	入力轴功率 (kw)	0.95	0.67	0.52	0.44	0.40	0.35	0.33	0.37	0.37	0.37	0.37	0.37	0.37	0.37
	出力轴力矩 (Nm)	500	500	500	500	500	500	500	195	276	356	420	463	529	561
70-120	入力轴功率 (kw)	1.64	1.18	0.91	0.84	0.71	0.58	0.54	0.75	0.75	0.75	0.75	0.75	0.37	0.75
	出力轴力矩 (Nm)	840	840	840	840	840	840	840	384	534	692	750	887	536	1166
80-135	入力轴功率 (kw)	2.50	1.75	1.39	1.19	1.08	0.98	0.85	1.5	1.5	1.5	1.5	1.5	0.75	1.5
	出力轴力矩 (Nm)	1400	1400	1400	1400	1400	1400	1400	616	880	1108	1294	1426	1071	1811
100-155	入力轴功率 (kw)	3.69	2.92	2.41	2.07	1.89	1.69	1.50	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	出力轴力矩 (Nm)	2100	2100	2100	2100	2100	2100	2100	854	1079	1307	1522	1667	1864	2100
120-175	入力轴功率 (kw)	5.09	3.91	3.27	2.72	2.53	2.50	2.05	3	3	3	3	3	2.2	3
	出力轴力矩 (Nm)	3050	3050	3050	3050	3050	3050	3050	1798	2340	2798	3364	3616	2685	4463
135-200	入力轴功率 (kw)	7.22	5.41	4.46	3.83	3.46	2.91	2.71	4	4	4	4	4	3	4
	出力轴力矩 (Nm)	3950	3950	3950	3950	3950	3950	3950	2188	2920	3543	4125	4566	4072	5830
155-250	入力轴功率 (kw)	11.71	8.14	6.00	5.14	4.67	4.07	3.67	5.5	5.5	5.5	5.5	5.5	5.5	5.5
	出力轴力矩 (Nm)	6050	6050	6050	6050	6050	6050	6050	2841	4087	5546	6473	7125	8175	9066



WD型入力轴功率及出力轴力矩表

Input and Output

入力轴转速 speed of input shaft:1500r/min

型号 size	模数 modules	减速比 ratio	入力轴功率 input(kw)	出力轴力矩 output(Nm)	型号 size	模数 modules	减速比 ratio	入力轴功率 input(kw)	出力轴力矩 output(Nm)
33	1.5	15	0.21	13	78	3	20	1.11	105
		30	0.14	14			40	0.73	115
43	1.5	20	0.22	17	93	3	25	1.49	176
		40	0.16	19			50	0.96	190
48	1.5	25	0.23	23	108	3	30	2.00	283
		50	0.18	28			60	1.10	261
55.5	1.5	30	0.26	32	63	4	10	1.20	57
		60	0.20	38			20	0.73	59
33	2	10	0.28	13	82	4	15	1.75	132
		20	0.16	11			30	1.10	139
43	2	15	0.31	21	102	4	20	2.60	262
		30	0.22	24			40	1.68	282
53	2	20	0.40	36	122	4	25	3.28	412
		40	0.27	39			50	1.88	395
63	2	25	0.65	74	80	5	10	2.36	122
		50	0.42	75			20	1.36	118
73	2	30	0.84	114	105	5	15	3.12	241
		60	0.57	122			30	2.08	270
43	2.5	10	0.37	16	130	5	20	3.58	369
		20	0.25	18			40	2.27	393
53	2.5	15	0.43	30	153	5	25	4.70	570
		30	0.29	32			50	2.90	595
63	2.5	20	0.67	64	122	6	15	4.63	358
		40	0.45	70			30	2.80	385
78	2.5	25	0.95	110	153	6	20	5.21	537
		50	0.64	120			40	3.29	603
90	2.5	30	1.32	187	180	6	25	6.60	851
		60	0.82	188			50	3.96	908
48	3	10	0.63	31					
		20	0.39	30					
63	3	15	0.85	60					
		30	0.58	69					